



Cabin Air Filter

Removal & Installation Instructions

To maintain air conditioning efficiency, replace the air filter according to the manufacturer's maintenance schedule.

Always use an air filter. Removing the filter may decrease system performance by allowing dust to lower the efficiency of A/C and heating system components.

Prior to the installation of this DENSO First Time Fit® Cabin Air Filter, you must read these instructions completely.

Definition of Terms

⚠WARNING: Describes precautions that should be observed in order to prevent injury or death to the user during installation.

⚠CAUTION: Describes precautions that should be observed in order to prevent damage to the vehicle or its components, which may occur during installation if sufficient care is not taken.

NOTE: Provides additional information that facilitates installation work.

General Service Information and Requirements

⚠WARNING: To prevent the Supplemental Restraint System (SRS, Air Bag System) from operating, remove the ground (negative) cable from the battery, then wait at least 90 seconds before starting this procedure. This allows the backup power system to discharge.

NOTE: For more detailed instructions please refer to the vehicle manufacturer's service manual.

REQUIRED TOOLS:

- Safety Goggles
- Assorted Hand Tools

SAFETY PRECAUTIONS:

- Always wear safety goggles

Cabin Air Filter Removal

The information below explains necessary procedures and tools to remove and install the Cabin Air Filter (CAF).

NOTE: This CAF and corresponding installation instructions are designed for multiple vehicles and model years. Although every consideration and resource was used during its creation, the instructions may not match exactly to your vehicle; however it is DENSO's expectation that these instructions will be able to direct the installer through the CAF replacement.

FUSION AND MKZ MODELS

Remove glove compartment in the following steps:

1. Remove right hand instrument panel side trim panel.

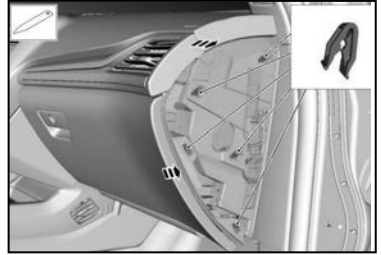


Fig. 1

2. On Fusion models, remove upper ventilation trim panel.



Fig. 2

3. On Fusion and MKZ models, remove glove compartment fasteners and glove compartment.
4. Disconnect electrical connectors.



Fig. 3

MILAN MODELS

1. Remove glove compartment.



Fig. 4

ALL MODELS

1. On all models, remove cabin air filter access cover.
2. Remove cabin air filter by pushing down on right hand side flap of filter so it clears damper.

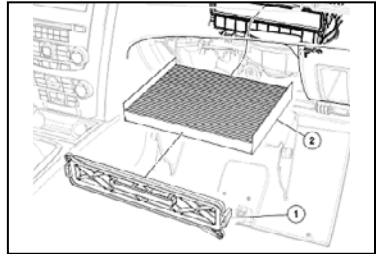


Fig. 5

Cabin Air Filter Installation

ALL MODELS

1. Install new filter into housing.
2. Ensure that the filter housing cover is properly seated.
3. Reinstall previously removed parts.

Noise Test

1. Reconnect the battery ground cable.
2. Engine ON, A/C ON, blower speed on high.
3. Listen for any abnormal air noises from the air filter area.