


GO RHINO®

INSTALLATION INSTRUCTIONS

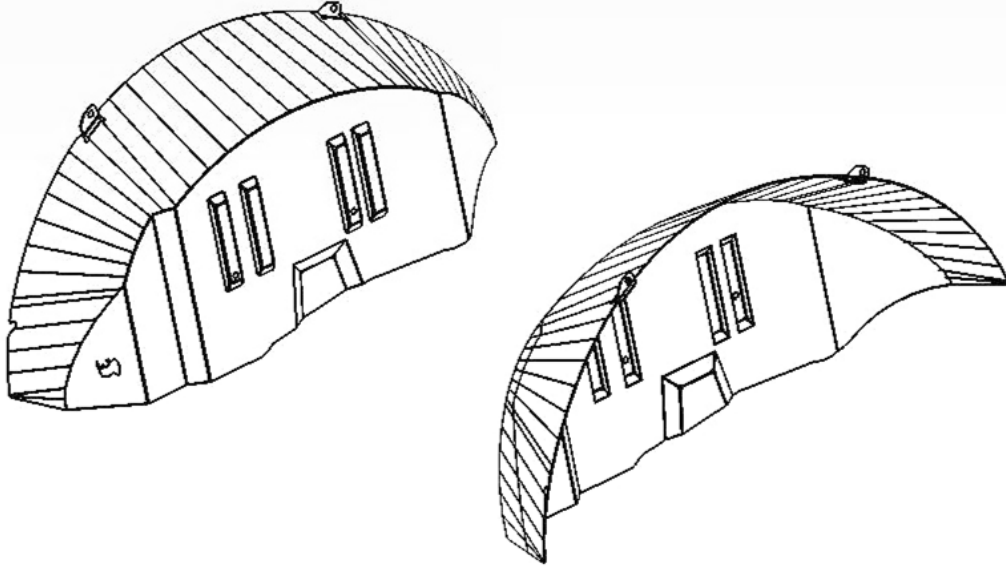

PART NO.

- 702012T

PRODUCT DESCRIPTION:

- REAR INNER FENDER LINER

APPLICATION:

- JEEP WRANGLER JL

PRODUCT SAFETY & LEGAL DISCLAIMER

- **IMPORTANT READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY.**
- **Review the product package and contents prior to beginning the installation.** Take care when opening the packaging and removing items. If a return is needed you will want to return the product in its original packaging if possible.
- This instruction guide is provided as a GENERAL installation guide, some vehicles vary dimensionally and may require additional steps.
- Test fit the product on the vehicle prior to any third party modifications and or finishing. The manufacturer and/or distributors do not accept responsibility for third party charges, labor and or third part replacement modifications. Some modifications may void the factory warranty.
- Exercise due-diligence when installing this product. The manufacturer and distributors of this product do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product. Careless installation and operation can result in serious injury or equipment damage.
- This product is for general off-road use. All liability for installation and use rests with the owner/operator.
- **INSTALLER:** Once installation is complete, please return this guide along with other documentation included in this product back to the consumer for future reference. The manufacturer/distributors of this product do not guarantee this particular version will be available at a later date.



INSTALLATION INSTRUCTIONS

INJURY HAZARD

Please complete a shop and tool inspection prior to beginning the installation.

- Always make sure you have a clean, dry and well lit work area.
- Always remove jewelry, loose fitting clothing and wear protective gloves and eye protection.
- Always use extreme caution when jacking or raising a vehicle for work. Set the emergency brake and use tire/wheel blocks and jack stands. Refer to the vehicle manufacturer hand book. Utilize the vehicle manufacturers designated lifting points.
- Always use appropriate and adequate care in lifting parts during disassembly and installation. Seek help in lifting heavy or large items into place. Utilize jacks and or lifting devices when available.
- Always insure products are secure during disassembly and installation.
- Always wear eye protection and take steps to protect any exposed skin during the installations. Drilling, cutting and grinding plastic and metal may create flying particles that can cause injury.
- Always use extreme caution when drilling, cutting and or grinding on a vehicle. Thoroughly inspect the area to be drilled, on both sides of material, prior to modification and relocate any objects that may become damaged.
- Always assemble and tighten all fasteners per the installation instructions.
- Always route electrical cables carefully. Avoid moving parts, parts that may become hot and rough or sharp edges.
- Always insulate and protect all exposed wiring and electrical connections.

MAINTENANCE AND CARE

- Always perform regular inspections and maintenance on mounts and related fasteners.
- Periodically check and tighten all fasteners.
- Stripped, fractured, or bent fasteners must be replaced.
- After washing the vehicle make sure to fully dry all surfaces.
- In areas with cold temperatures make sure to wash the product often to remove harmful materials used on road ways.
- Never use abrasive cleaners or polish compounds. Clean with a gentle soap and water. If you use wax use a non-abrasive automotive wax such as pure carnauba wax.

WARNING

Some products have been designed to work together with factory rear sensor systems, factory forward facing sensor systems and factory air bags.




- Installation of some of these products may alter the factory sensor system performance.
- Factory sensors may read shackles or hooks protruding from the fairlead and or tow hooks.
- All sensor testing is completed by Go Rhino Products and or third party testing labs on modified vehicles.
- Sensor sensitivity, factory sensor housing, orientation, and operating conditions are all variables that will influence functionality of the sensors.
- Installation of some product may effect the factory air bag systems.
- Some products allow the use of third party products such as winches, shackles, hooks, etc. Follow the respective manufacturers operating instructions for use with our products.
- Make sure to fully understand the product, it's intended use and operation prior to use.
- Above all... be safe!

GO RHINO®

INSTALLATION INSTRUCTIONS

PARTS INCLUDED IN THIS LIST:

ITEM	QTY.	DESCRIPTION	ITEM	QTY.	DESCRIPTION
A	8	1/4"-20 x 3/4" Button Head Hex Drive Screw	E	1	Rivet-Nut Installation Tool
B	8	1/4" Lock Washer	F	1	Passenger Inner Fender Liner
C	8	1/4" Flat Washer	G	1	Driver Inner Fender Liner
D	4	1/4" Rivet-Nut			

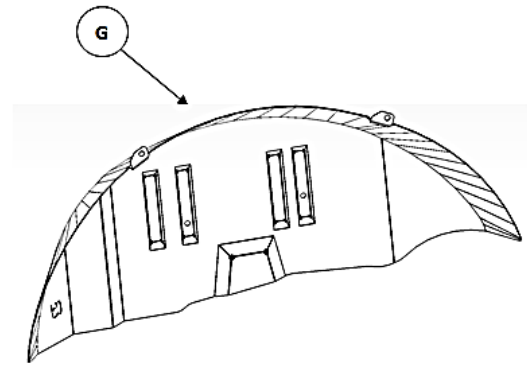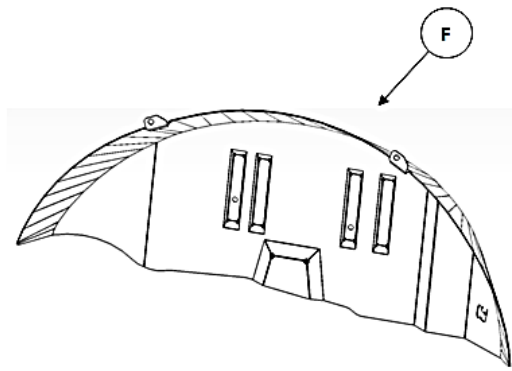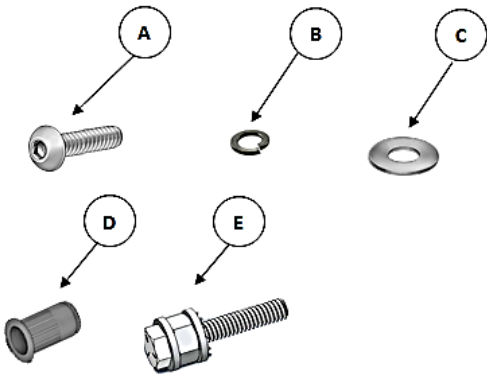

Go Rhino recommends you, the installer, read this installation instruction manual from front to back before installing the product. You may also to view an installation video.

TOOLS NEEDED FOR INSTALLATION:

- 7/16" Wrench, Socket & Ratchet
- Trim Removal Tool , or Flat Blade Screw Driver
- Pin Removal Punch , or Razor Knife
- 5/32" Hex Key
- Drill Motor, & 25/64" Drill Bit

ESTIMATED TIME FOR INSTALLATION:

1 1/2 Hour

GO RHINO[®]

INSTALLATION INSTRUCTIONS

Step-1 Beginning on the driver side, remove the fasteners and the OEM fender flair and liner from the vehicle. **Note:** Reference the installation instructions for Go Rhino Jeep JL Wrangler fenders to remove the OEM fender flair and liner.

Step-2 Locate the hole in the (2) tabs at the bottom of the wheel well area and the (2) holes in the body panel, and enlarge the holes to 25/64", (FIGURE 1). **Note:** Apply rust preventer to the re-drilled holes.

FIGURE 1

Enlarge holes in body panel using a drill motor and 25/64" drill bit.


Enlarge hole in tabs using a drill motor and 25/64" drill bit.

Driver side


GORRHINO[®]

INSTALLATION INSTRUCTIONS

Step-3 Assemble the rivet-nut, and tool components (flat washer, bearing, flat washer, bolt and nut).

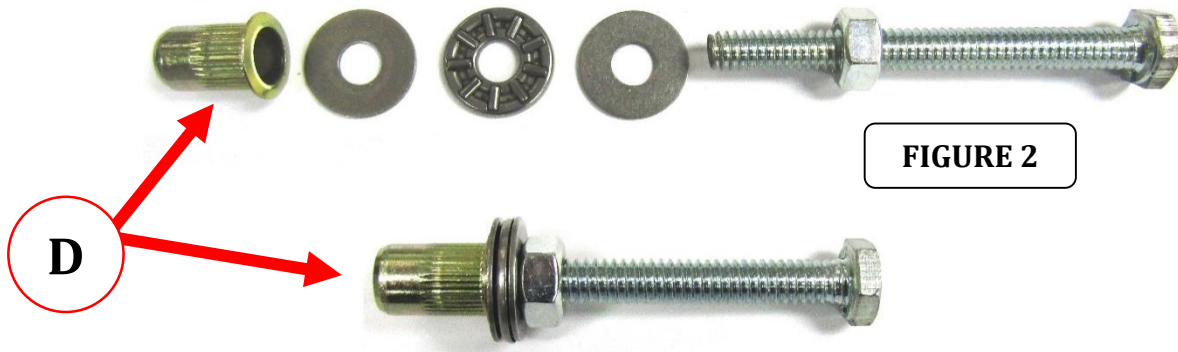

Step-4 Place the rivet-nut with the attached tool components into the enlarged hole in one of the tabs. Use a 7/16" wrench to hold the nut, and tighten the bolt using a 7/16" wrench or socket and ratchet. Continue tightening the bolt until the rivet-nut is fully compressed and no longer spins then remove the tool components, (FIGURE 3). Repeat for the enlarged hole in the remaining tab.

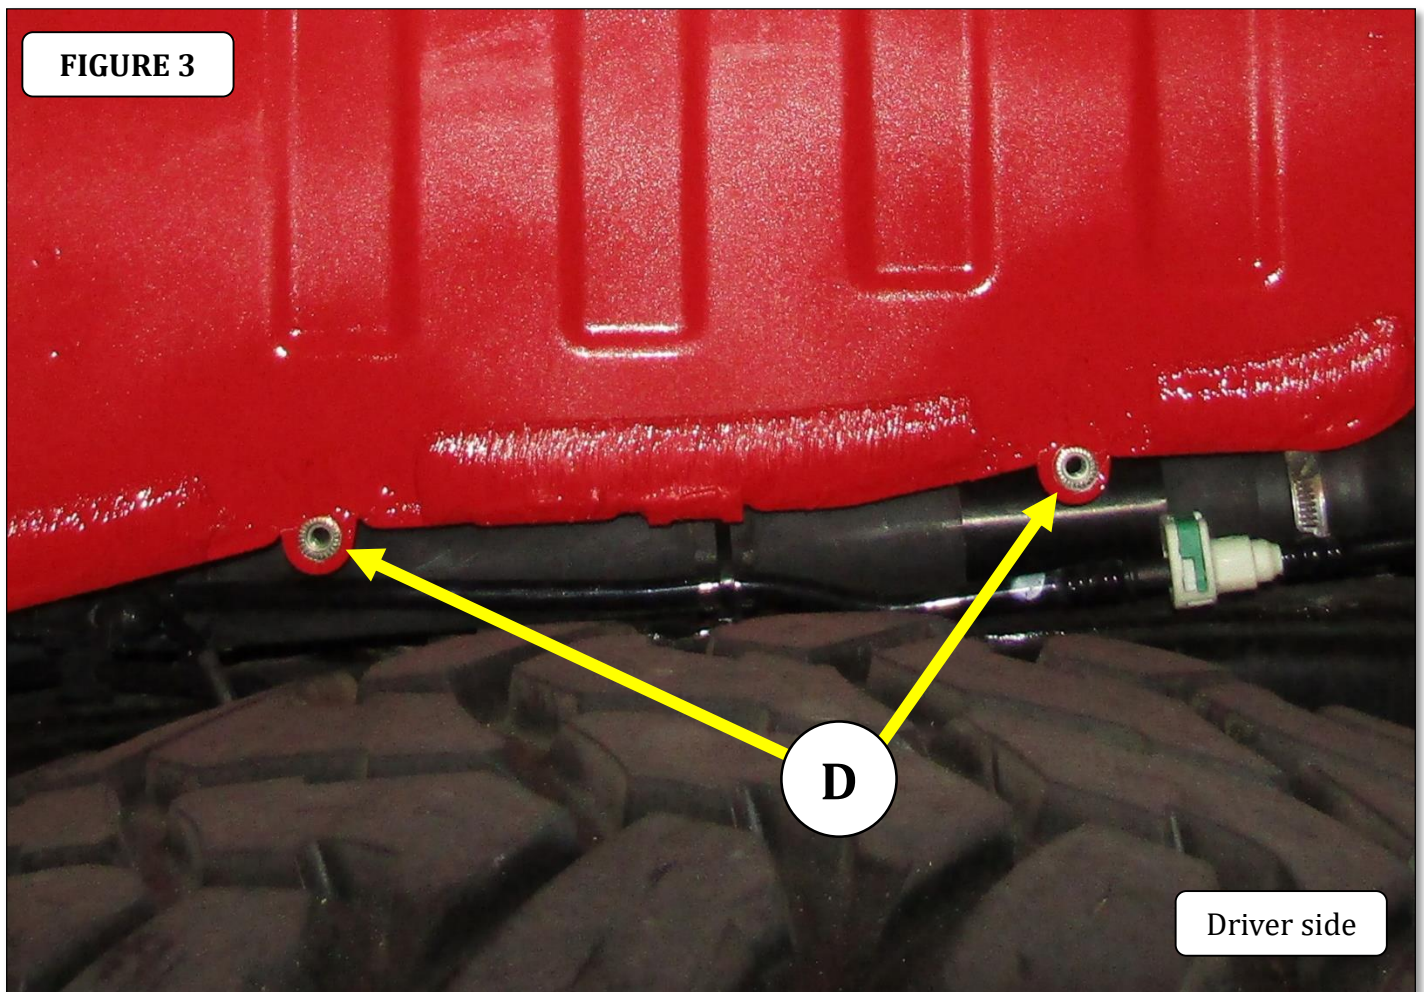


GORRHINO[®]

INSTALLATION INSTRUCTIONS

Step-5 Position the passenger side rear inner fender liner in the wheel well area of the vehicle with the tabs behind the body panel.

Step-6 Align the (2) tabs at the top of rear inner fender liner with the re-drilled holes in the body panel, and secure the rear inner fender liner to the body panel using (2) 1/4" x 3/4" button head hex drive screws, (2) 1/4" lock washers and (2) 1/4" flat washers, (FIGURE-4). Leave the screws loose.

Step-7 Align the (2) holes in the rear inner fender liner with the rivet-nuts installed in the wheel well and secure the rear inner fender liner to the wheel well using (2) 1/4" x 3/4" button head hex drive screws, (2) 1/4" lock washers and (2) 1/4" flat washers, (FIGURE-4). Tighten all screws securing the rear inner fender liner to the vehicle. Repeat the steps listed to install the passenger side rear inner fender liner.

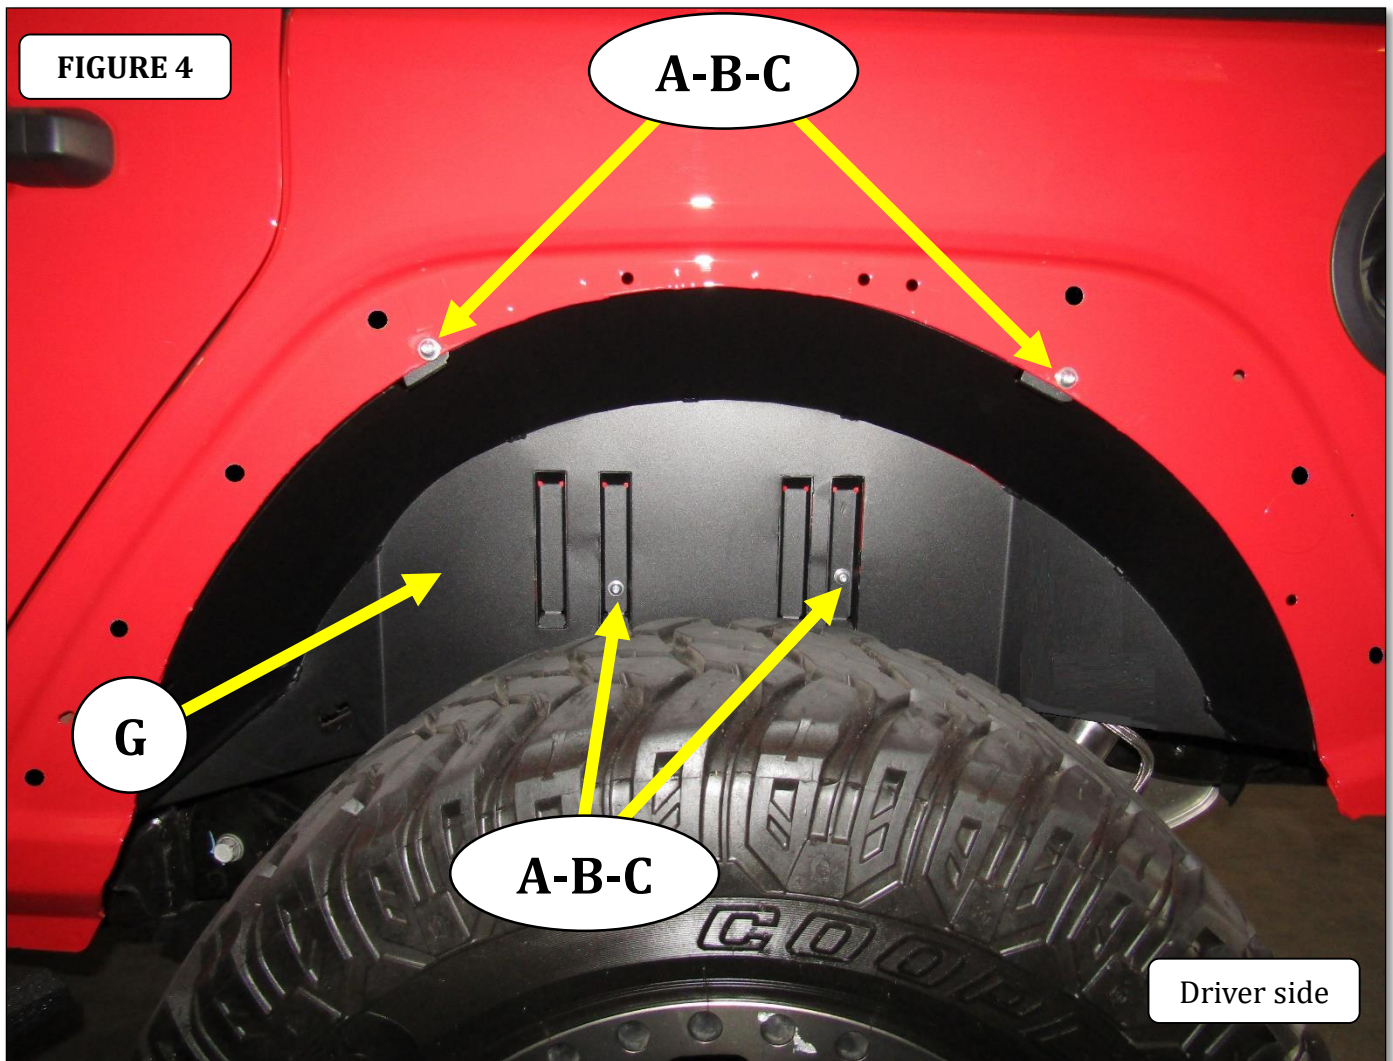

GO RHINO®

INSTALLATION INSTRUCTIONS

Complete the look with the installation of Go Rhino precision engineered steel fenders for the Jeep JL Wrangler.

