




Hellwig PRODUCTS

INSTALLATION INSTRUCTIONS


Rear Stabilizer Bar

94-02 DODGE 4X2 D1500-D3500 TRUCK INCLUDING DUAL WHEELS

Thank you for purchasing a quality Hellwig Product.

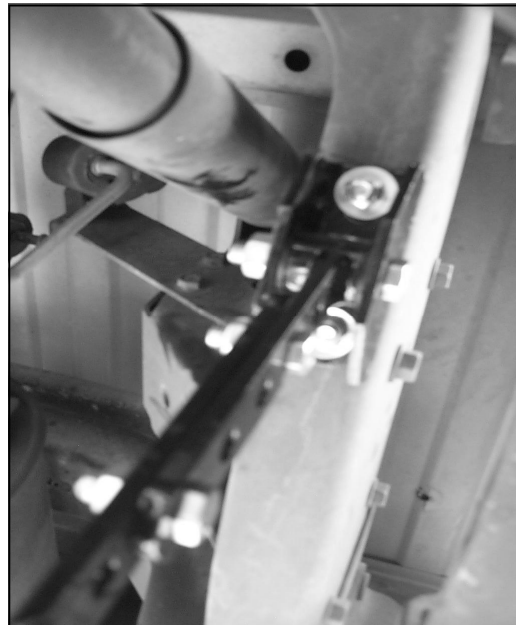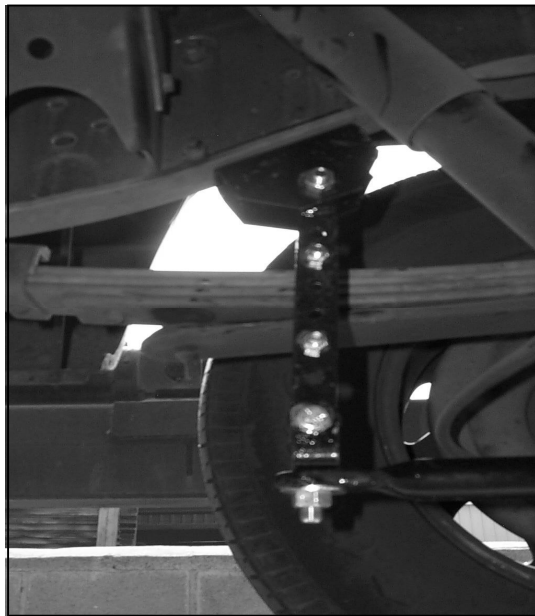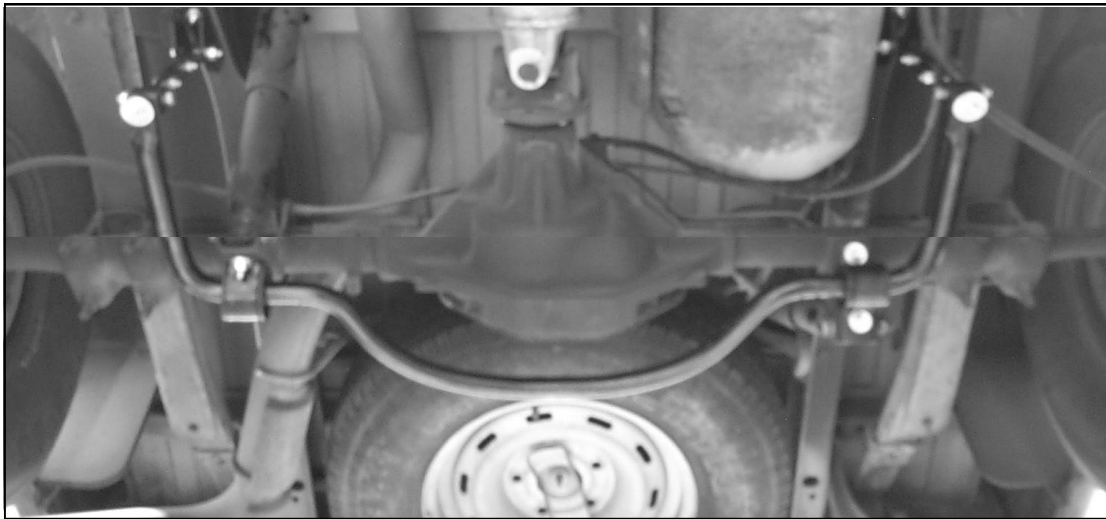

Hellwig PRODUCTS

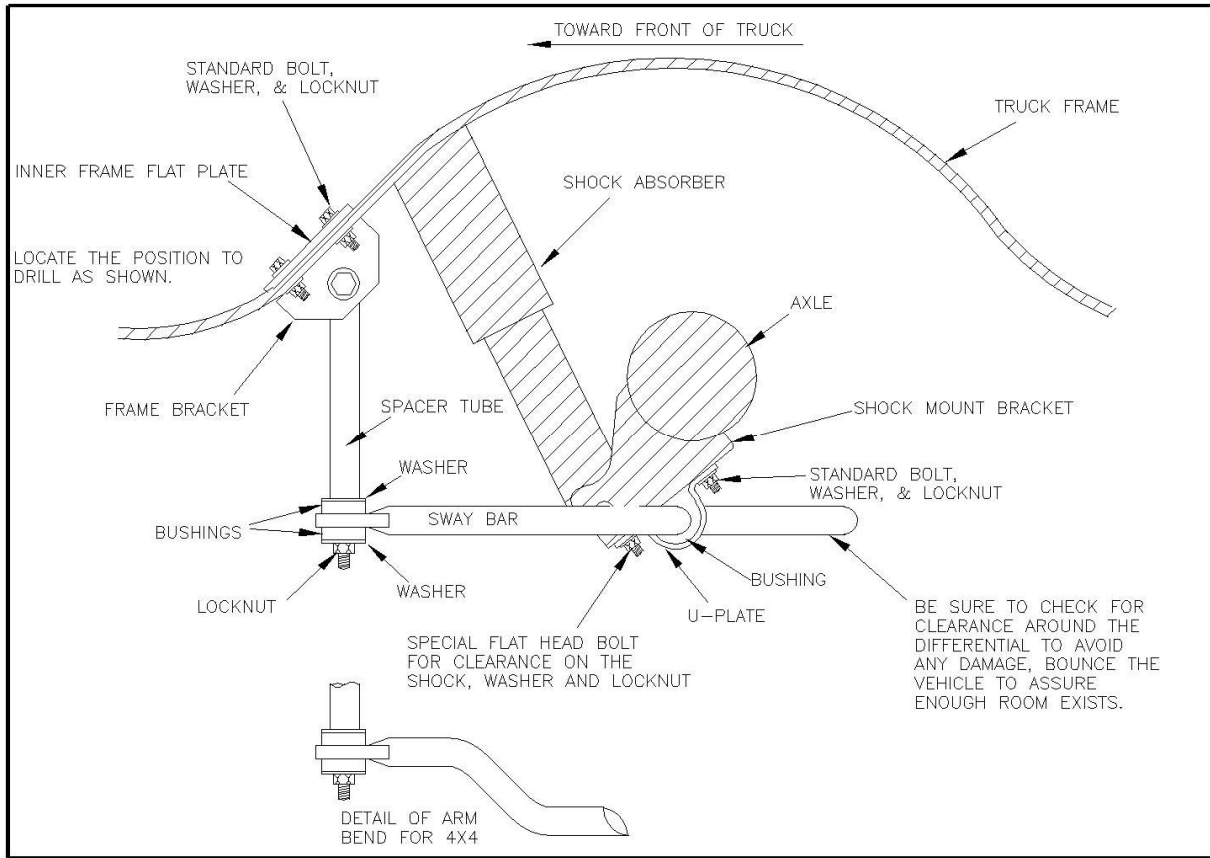

TORQUE TABLE

BOLT SIZE: 3/8" = 20-30 ft. lbs. – 7/16" = 35-45 ft. lbs. – 1/2" = 50-70 ft. lbs. – 9/16" = 70-90 ft. lbs.

SAFETY: BEFORE STARTING YOUR INSTALLATION, BE SURE TO SET PARKING BRAKE AND CHOCK THE WHEELS.

NOTE: TO EASE INSTALLATION AND TO PROPERLY ADJUST BAR, THE WEIGHT OF THE VEHICLE MUST BE ON THE SUSPENSION, AS IF DRIVING DOWN THE ROAD. DO NOT RAISE THE VEHICLE BY THE FRAME.

NOTE: THIS UNIT IS DESIGNED TO MOUNT TO THE BOTTOM OF THE AXLE SHOCK MOUNTS WITH THE ARMS OF THE BAR FACING TOWARDS THE FRONT OF THE VEHICLE. IT WILL BE NECESSARY TO REMOVE THE BOTTOM OF THE SHOCK FROM THE LOWER SHOCK MOUNTS. IT MAY ALSO BE NECESSARY TO DRILL TWO (2) HOLES IN THE BOTTOM OF THE FRAME RAIL ON SOME VEHICLES.

NOTE: THIS KIT INCLUDES LOCKNUTS WHICH REQUIRE TIGHTENING WITH A WRENCH AFTER BEING STARTED BY HAND

1. Install the D-shaped poly –bushings onto the bar on each side of the center hump. These bushings will align with the shock mounts on the axle.
2. With the shocks removed from the lower axle mounts. Place the mounting bolts provided into the holes in the bottom of the shock mounts so that the threads are pointing downward. The hole that is directly below the shock will use the special clearance flat head bolt provided. The square shoulders under the bolt head should press into the hole, which will not allow the bolt to turn.
3. As per diagram, place the U-plates over the bushings on the bar and attach to the plates with hardware provided. **Leave loose at this time to allow for adjustment later.**

Hellwig PRODUCTS

4. Assemble the end-links by installing the sleeve type poly-bushing (it may be necessary to lightly grease the poly-bushing and steel sleeve before installing) into the tube welded to the end of the link. Place the small steel sleeve inside the bushing to complete this end of the assembly. **See Diagram in instruction sheet insert (R-344).** Mount the small U-shaped bracket to the end of the bar. Then match up the holes in the end-links to the length needed that will allow the arms of the bar to be as level with the frame as possible.
5. Rotate the bar so that the brackets contact the bottom of the frame. Align the end-links in as straight up and down position as possible. The end-links will show the position where the frame brackets will contact the bottom of the frame rails.
6. With the frame brackets up against the frame and the bar centered and all adjustments locating the bar under the vehicle properly. If your vehicle does not have the factory mounting holes. Mark the frame with the centers of the frame bracket mounting holes and drill two (2) **7/16"** holes in the bottom of each frame rail. **Be sure to move any wires or lines from inside the frame to avoid any possible damage.**
7. Mount the frame brackets to the frame with hardware provided. Place the small flat two (2) hole plate inside the frame rail above the frame brackets. Torque all frame and axle mounting hardware to the specified rates. Reinstall the shocks in their mounts and torque.
8. Bounce the vehicle and check for clearance on all carriage components, shocks, exhaust etc.....
Drive the vehicle for a short distance then recheck your installation and periodically thereafter.