

**DODGE DURANGO REAR MUD GUARDS INSTALLATION INSTRUCTIONS**

*Please read instructions thoroughly before installation.*

**Tools Required**

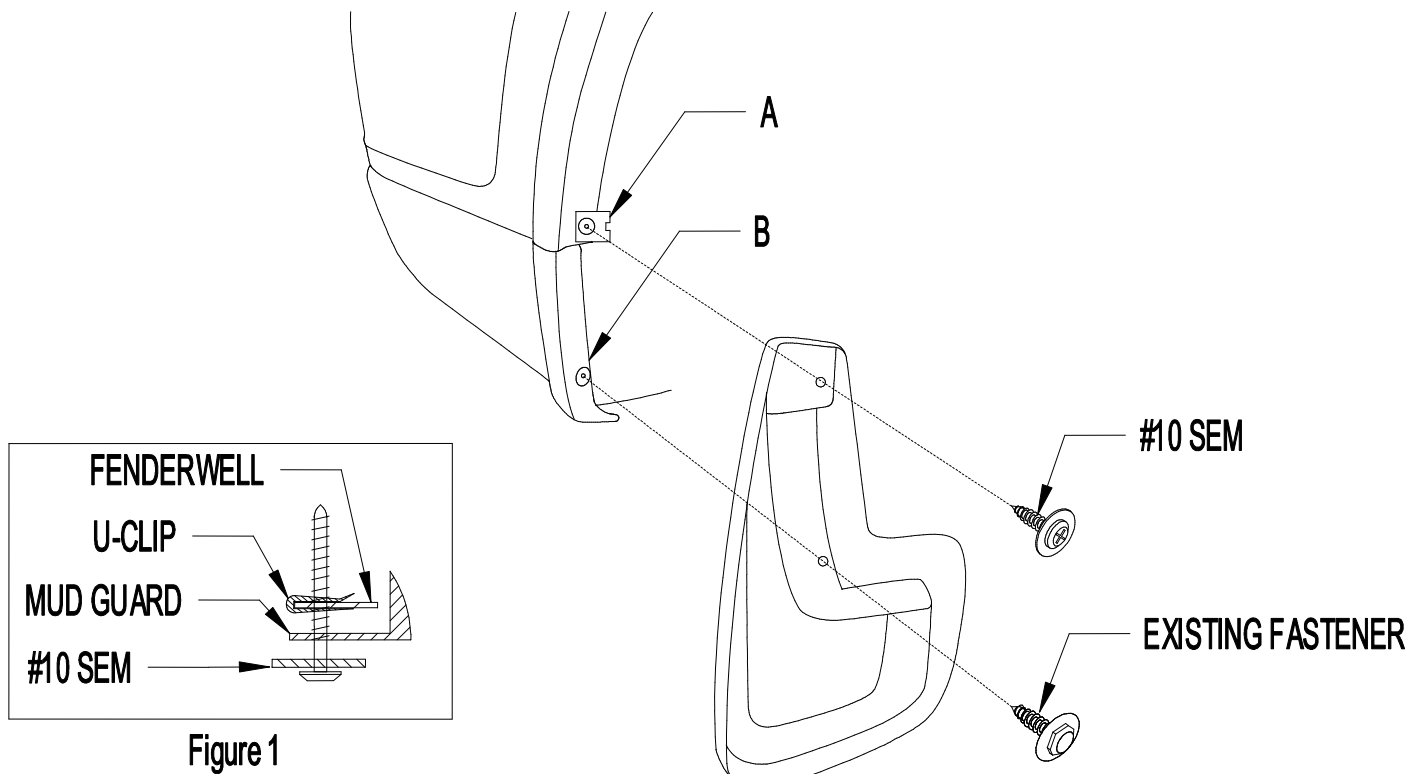
- Short Phillips screwdriver or drill attachment
- 5/16 Socket / Wrench

**Package Contents**

- Driver & passenger side rear mud guard
- #10 SEM screw (qty. 2)
- U-clip (qty. 2)
- Instruction sheet

**NOTE:** It may be necessary to remove the wheels depending on the tools being used for installation.

1. Clean and degrease the mud guard location area on the fender before installation.
2. Remove existing fastener from location A and C.
3. Pull fender liner forward and install U-clip at location A. U-clip clips over fender tab. (Figure 1).
4. Attach mud guard to rear fender at location B with existing fastener. Check fit and level before tightening.
5. Install #10 SEM at location A.

**PAINTING INSTRUCTIONS**

**Note:** *If painting mud guards, perform a mud guard test fit to ensure correct fit and application prior to painting.*

1. Clean mud guard with a soap and water solution to remove dirt and other contaminants.
2. Sand painting surface with 320 grit sand paper.
3. Apply a coating of flexible primer-adhesion promoter.
4. Apply a flexible paint as directed by the paint manufacturer.