



CONTROL IS
EVERYTHING

MSS Install Guide

Supplied for the Mercedes C-Class 2014 onwards





R5 MSS Ltd
 MSS House
 A3 Albion Daedalus Park
 Daedalus Drive
 Lee On The Solent
 Gosport
 Hampshire
 PO13 9FX
 United Kingdom
 Company No. 09360144
 mss.company



R5 MSS Ltd
 MSS House
 A3 Albion Daedalus Park
 Daedalus Drive
 Lee On The Solent
 Gosport
 Hampshire
 PO13 9FX
 United Kingdom
 Company No. 09360144
 mss.company

Introduction


This short guide is intended for use with MSS Kit for the **Mercedes C-Class 2014 to present** (all variants up to the AMG range).

Pre-install steps


Refer to pages 3 and 4 of the latest version of the 'MSS INFO for Installer' or email support@mss.company for the latest copy, to measure the current ride height.

Front Axle Install Parts List


Before you start installing your new MSS Kit, check if all parts listed below have been supplied:

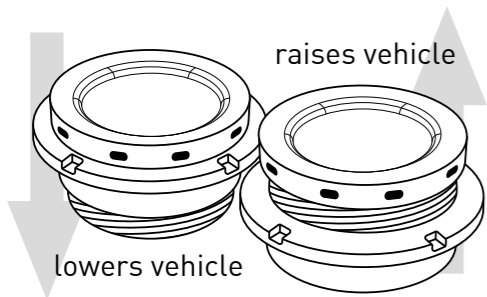


2x Large adjusters - these are the larger of the 2 sets

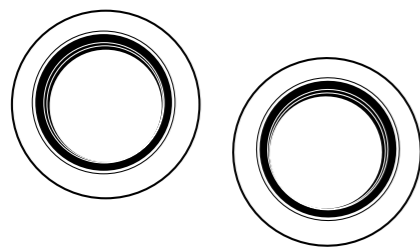


2x MSS supplied OE bearing parts - these must replace the ones removed




2x MSS polyurethane (PU) hard rubber seats

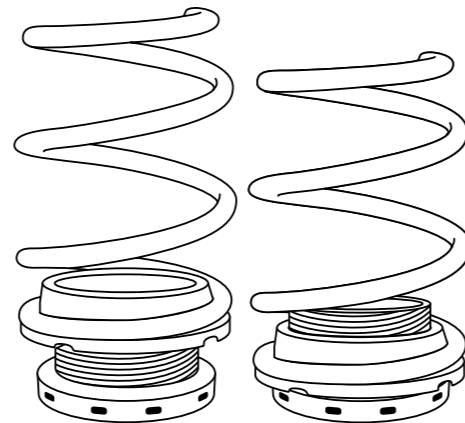

2x Large diameter MSS orange springs - these fit the larger adjusters (Shown)



2x OPTIONAL Large protective sleeves - these fit around the large adjusters



2x MSS supplied Large flat rubber slip mats to eliminate resonant road noise travelling through the system



FRONT AXLE INSTALL PROCEDURE

This is best done with struts removed from the vehicle. Refer to the manufacturer's workshop manual for steps on how to safely remove the struts from the vehicle, remove and refit the springs and on the correct torque settings.

Difficulty level: High ~~~

Estimated Time: 60 to 90 minutes per side, assuming the bolts are not seized.

Installing your new MSS Kit is best undertaken by an experienced Mercedes Benz workshop/engineer.

1. Remove the OE springs. These will be replaced by the MSS front system supplied.
2. Remove and keep the OE rubber dust boots. These will be re-used.
3. Keep the OE bump stop to re-use.
4. Fit the MSS PU rubber seat over the strut to fit snugly with the perch based stepped seat.
5. Fit the OE bearing over the strut to sit flush to the MSS PU rubber seat at the base of the perch.
6. Ensure that the steel part is facing upwards to fit the MSS large adjuster.
7. Now fit the MSS supplied large rubber mat on top of the bearing and then place the MSS large adjuster to sit on top to the rubber mat & bearing
8. Fit the MSS protective sleeve over the adjuster and bearing for protection from dust.
9. Fit the OE rubber dust boots over the strut shaft to protect it from debris.
10. Next, fit the large MSS orange spring.
11. Fit the camberplate to the MSS spring and turn the MSS adjuster to take up any free play.
12. Secure the arrangement with the nut at the top of the camberplate.
13. Tighten to the correct torque with appropriate tools used to remove the camberplate.
14. Set the adjuster to the desired position. Later, you can always re-adjust as required.

NOTE: The large adjuster sits at the bottom of the strut for easier access to adjustment.




R5 MSS Ltd
 MSS House
 A3 Albion Daedalus Park
 Daedalus Drive
 Lee On The Solent
 Gosport
 Hampshire
 PO13 9FX
 United Kingdom
 Company No. 09360144
 mss.company




R5 MSS Ltd
 MSS House
 A3 Albion Daedalus Park
 Daedalus Drive
 Lee On The Solent
 Gosport
 Hampshire
 PO13 9FX
 United Kingdom
 Company No. 09360144
 mss.company

Rear Axle Install Parts List


Before you start installing your new MSS Kit, check if all parts listed below have been supplied:




2x Black MSS springs -
 these are common parts used for almost all our products




2x Small diameter MSS orange springs



2x Combined adjusters -
 used to couple the black and orange springs

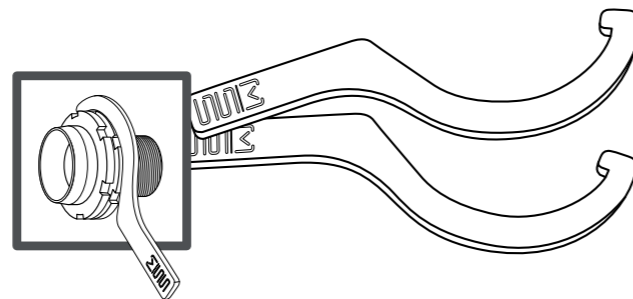

2x Adjuster spanners - for both front and rear adjusters



2x OPTIONAL Small protective sleeves -
 these fit around the combined adjusters



REAR AXLE INSTALL PROCEDURE

Difficulty level: Medium

Estimated Time: 60 to 90 minutes per side, assuming the bolts are not ceased.

Installing your new MSS Kit is best undertaken by an experienced Mercedes Benz workshop/engineer.

1. Remove the OE springs.
2. Separate the top mounted spring seat, which is formed of a plastic base plate and a rubber seat.
3. Retain the plastic base plate and re-fit that back on the vehicle. The base plate centralises the orange spring when fitted.
4. Fit the MSS protective sleeves over the adjuster for protection from dust.
5. Fit the MSS stacked arrangement back in place for the OE single form spring. Our stacked springs are a direct replacement for the factory single form springs. Therefore, no other OE parts are replaced during the rear axle install.
6. Tighten the suspension parts that had been removed. Refer to the manufacturer's workshop manual for steps on how to safely remove the struts from the vehicle, remove and refit the springs and on the correct torque settings.
7. Set the ride height to sit 5mm higher than the fronts when measured from fender edge to wheel hub centre.



Please be aware that this is a MUST DO.



Additional info -

Assembled parts prior to fitting to the vehicle



Front strut perch base fit



Rear stacked arrangement

POST INSTALL STEPS

Complete a 1-mile journey before setting the ride height and 4-wheel alignment. Refer to pages 3 and 4 of the latest version of the 'MSS INFO for Installer' guide for assistance on how to measure ride height.



The rear axle ride height should be set to at least 5mm higher than the front axle ride height when measured as per page 3 of the latest version of the 'MSS INFO for Installer' guide. **This is a KEY step.**



CONTROL IS
EVERYTHING

Triple Engineered
Suspension for
Ultimate Performance,
Comfort & Safety

Discover other performance suspension parts on our website.