

# 2015+ Mustang Heat Extractors

Installation Instructions  
P/N: 421869 (R1315-16C920)



# 2015+ Mustang Heat Extractors

Installation Instructions  
P/N: 421869 (R1315-16C920)



**Application:** 2015+ Ford Mustang 5.0L with Automatic/Manual Transmission

**Important Note:**

Before installing your ROUSH Performance Product(s), read through the entire installation procedure and check to make sure all items are present. .

**INSTALLATION OF THE ROUSH HEAT EXTRACTORS ELIMINATES THE FACTORY TURN INDICATORS FROM THIS LOCATION ON 2016 MODELS.**

**TABLE OF CONTENTS**

Packing List for 2015+ Mustang Heat Extractors .....3  
Equipment and Supplies Required.....3  
Limit of Liability Statement.....3  
Safety Precautions .....3  
Work Safely! .....3  
Installation .....4  
Template.....7

**PACKING LIST FOR 2015+ MUSTANG HEAT EXTRACTORS**

Description	Part Number	Quantity
Heat Extractor Assembly — LH	1315-16C929	1
Heat Extractor Assembly — RH	1315-16C928	1
Screw – M3 x 10 Self Tapper	96817A350	4
Adhesive Foam	1315-HEFOAM	4
Website Instruction Sheet	1315-P1INST	1

**EQUIPMENT AND SUPPLIES REQUIRED**

- 9 mm Socket
- 1/8" Drill Bit
- Center Punch
- Commercially Available Clear Coat (Motorcraft Part Number: PM-19500-6000)
- Plastic Pry Tool
- T10 Torx Drive
- Trim Removal Tool

**LIMIT OF LIABILITY STATEMENT**

The information contained in this publication was accurate and in effect at the time the publication was approved for printing and is subject to change without notice or liability. ROUSH Performance Products (RPP) reserves the right to revise the information presented herein or to discontinue the production of parts described at any time.

**SAFETY PRECAUTIONS**



**CAREFULLY READ THE IMPORTANT SAFETY PRECAUTIONS and WARNINGS BEFORE PROCEEDING WITH THE INSTALLATION!**

Appropriate disassembly, assembly methods and procedures are essential to ensure the personal safety of the individual performing the kit installation. Improper installation due to the failure to correctly follow these instructions could cause personal injury or death. Read each step of the installation manual carefully before starting the installation.

- Always wear safety glasses for eye protection.
- Place ignition switch in the OFF position.
- Always apply the parking brake when working on a vehicle.
- Block the front and rear tire surface to prevent unexpected vehicle movement.
- If working with a lift, always consult vehicle manual for correct lifting specifications.
- Operate the engine only in well-ventilated areas to avoid exposure to carbon monoxide.
- Do not smoke or use flammable items near or around the fuel system.
- Use chemicals and cleaners in well-ventilated areas.
- Batteries produce explosive gases, which can cause personal injury. Therefore, do not allow flames, sparks or flammable substances to come near the battery.
- Keeps hands and any other objects away from the radiator fan blades.
- Keep yourself and your clothing away from moving parts when the engine is running.
- Do not wear loose clothing or jewelry that can get caught in rotating parts or scratch surface finishes.
- Allow the engine, cooling system, brakes and exhaust to cool before working on a vehicle.

**WORK SAFELY!**

Perform this installation on a good clean level surface for maximum safety and with the engine turned off.

### INSTALLATION


The following section will guide you through the installation of the ROUSH Heat Extractors 421869 (1315-16C920).

1. Open the hood and remove the hood blanket by taking out the fifteen (15) push pins that are highlighted below with an appropriate trim removal tool.



**NOTE:** ROUSH heat extractors are not compatible with turn indicators found on 2016 models. The turn indicators will need to be disconnected and wiring secured.

2. Remove the two (2) adhesive pads that retain the cables for each factory heat extractor.

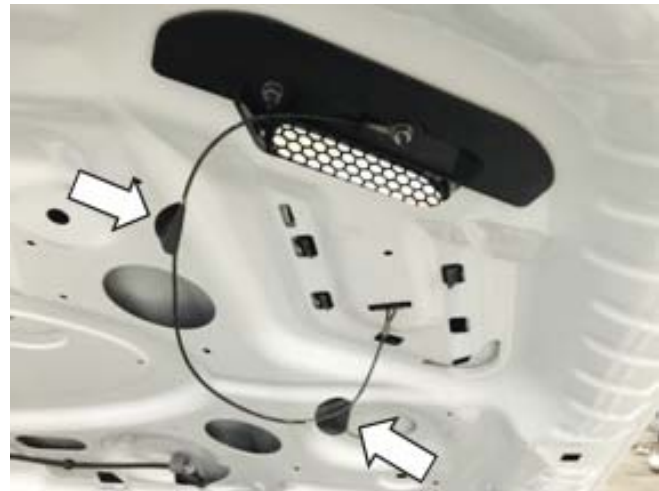

3. Remove two (2) 9 mm nuts, release the retaining clips and remove each factory heat extractor.




4. Remove the two (2) black plastic brackets from the hood by gently prying them off with your fingers or a non-marring trim tool. Clean off any leftover adhesive once they are removed.






5. Cut out the drill templates from the last page of this instruction manual, tape them in place as shown below and then mark the two (2) drill holes with a center punch.

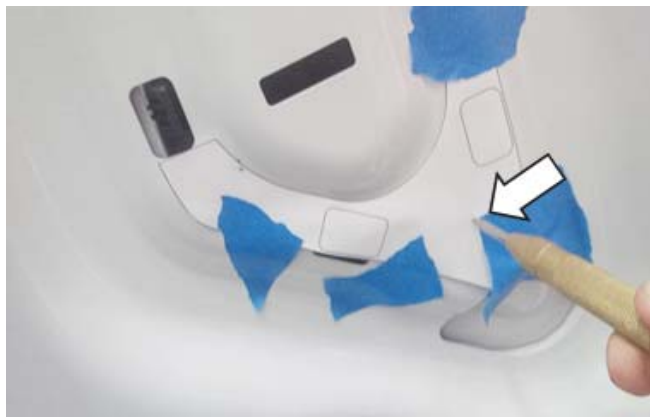


6. Drill each hole with a 1/8" bit. After the holes are drilled, apply commercially available clear coat (Motorcraft Part Number: PM-19500-6000) to the exposed metal so that it does not corrode.

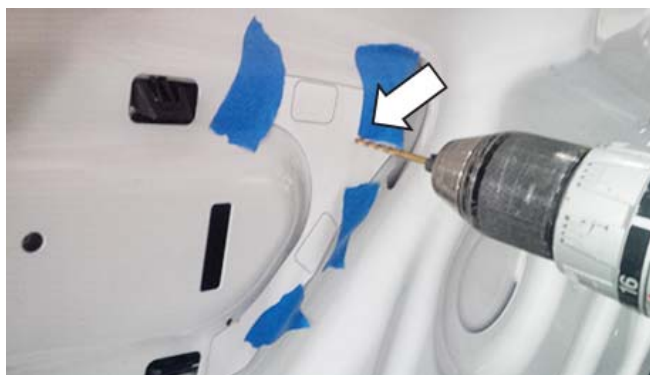


7. Install the supplied adhesive backed foam (P/N: 1315-HEFOAM-AA) to the bottom of the factory black plastic brackets as shown below.



8. Remove the two (2) studs from the factory heat extractors and install them on the ROUSH Heat Extractors.

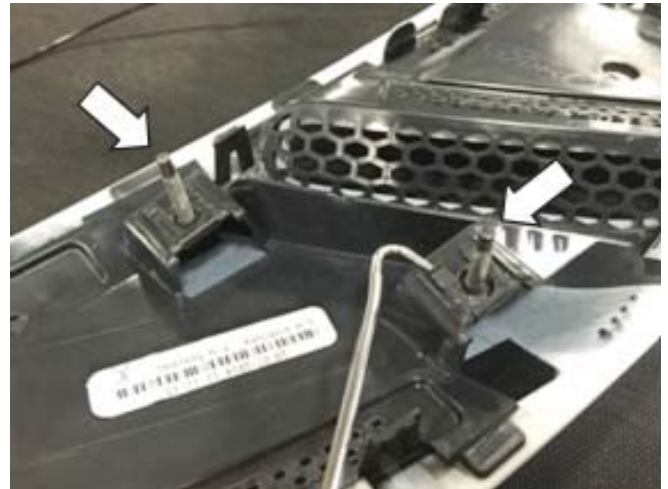

9. Install the ROUSH Heat Extractors by clipping them into the factory slots and installing two (2) T10 screws (P/N: 96817A350) in the holes that were drilled in step 6. Torque the screws to 0.4 Nm.

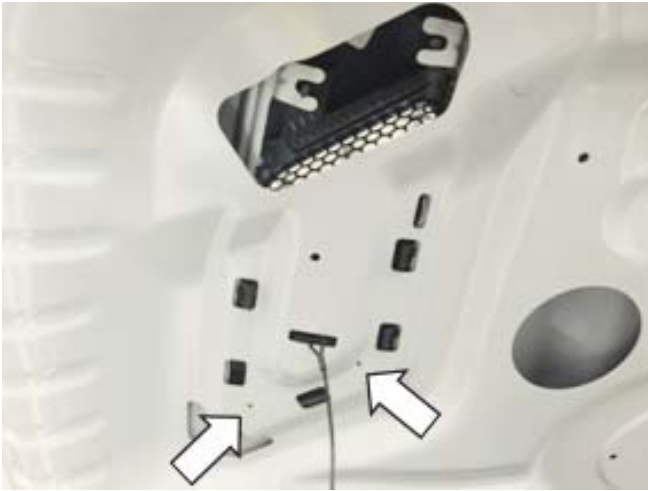

10. Reinstall the factory black plastic brackets with the two (2) nuts that were removed in step 3. Torque them to 1.4 Nm.



11. Trim two (2) of the hood blanket push pins as shown below.




12. Reinstall the factory hood blanket with the fifteen (15) pins that were removed in step 1. Be sure to use the trimmed push pins from step 11 in the locations that are identified below.



**Congratulations!** You have now completed the installation of your ROUSH Heat Extractors.

TEMPLATE

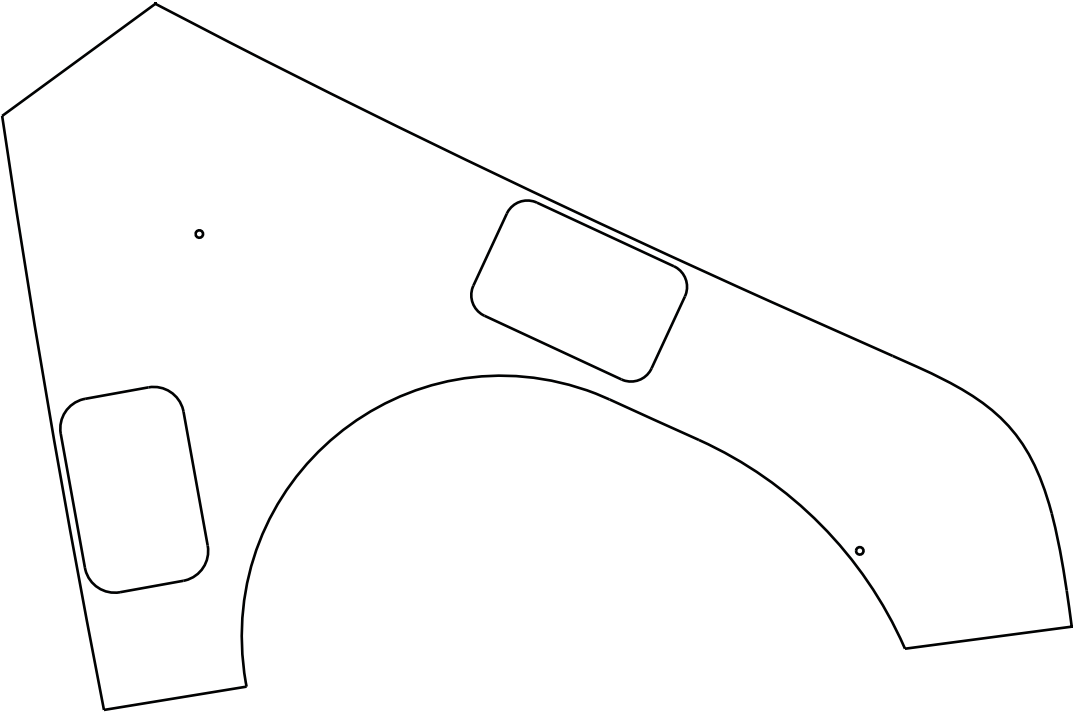

SCALE

