


| Cod.                   | Type                                                             | Fan diameter |
|------------------------|------------------------------------------------------------------|--------------|
| 3010.1516<br>3010.1517 | VA18 - AP51/C - 41A<br>VA18 - AP51/C - 41S<br>Suction<br>Blowing | 385 mm       |

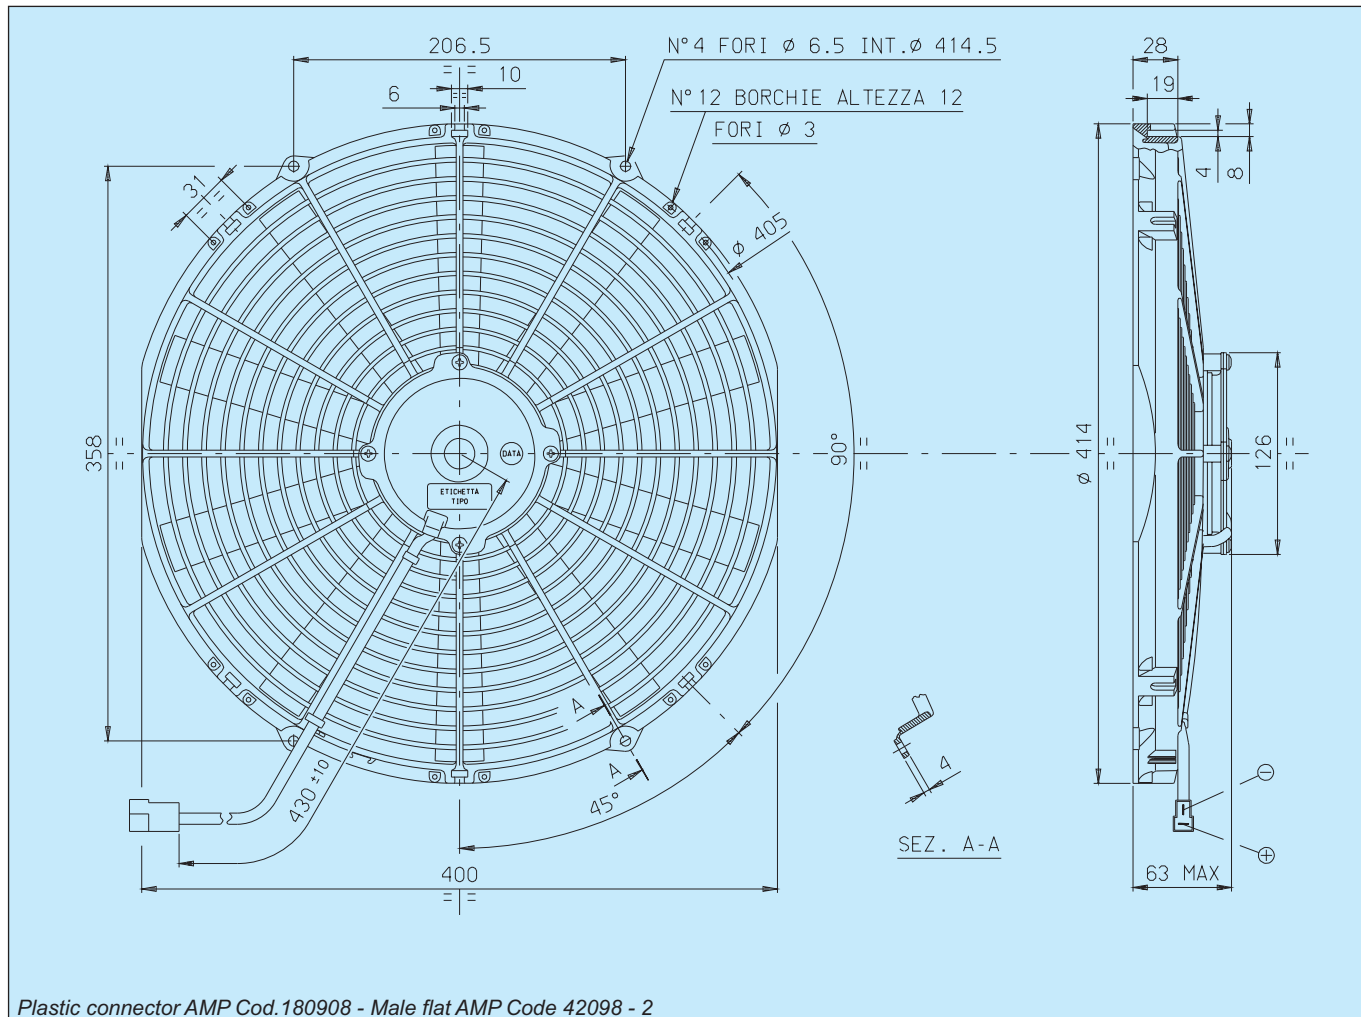

\* Weight 1,750 Kg. approx.

\* Waterproof motor, IP 68

\* Long life

\* Available also in LL and VLL versions for OEM applications only.

\* Available accessories:  
all the fixing kits.



Test voltage 13 V DC

| Static pressure<br>mm H <sub>2</sub> O | Airflow<br>m <sup>3</sup> /h | Current input<br>A |
|----------------------------------------|------------------------------|--------------------|
| 0                                      | 2720                         | 11,0               |
| 2,5                                    | 2550                         | 11,6               |
| 5                                      | 2350                         | 12,2               |
| 7,5                                    | 2190                         | 12,5               |
| 10                                     | 1960                         | 12,9               |
| 12,5                                   | 1720                         | 13,0               |
| 15                                     | 1410                         | 12,9               |
| 17,5                                   | 1050                         | 12,5               |
| 20                                     | 720                          | 12,2               |
| 25                                     | 0                            | 11,5               |

Static pressure: 1 mm H<sub>2</sub>O = 0,04 in. H<sub>2</sub>O  
Airflow: 1 m<sup>3</sup>/h = 0,59 cfm