

SPEC-D *Tuning*

2004-2006 NISSAN SENTRA PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise. Please wear protection before you work on your vehicle.

An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Trim Pad Remover ¼" Drive Extensions (6 to 12 inches)
Flat Tip Screwdriver
¼" Drive Ratchet
10mm Socket

If your Headlight is Halo type, you also need:
4 Blue Male Quick Wire Connectors
4 Blue Female Quick Wire Connectors
2 Red Wires (8 inch)
2 Black Wires (8 inch)

Product Part Numbers:

2LHP-SEN04JM-V2-TM

2LHP-SEN04-TM



NISSAN SENTRA PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
Please wear protection before you work on your vehicle.
An assistant is helpful when removing the front bumper.
Please be careful while working with the bumper or body part to avoid scratching.
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Remove four clips



2. Remove first 10mm bolt at side of bumper



3. Pull out the bumper



4. Disconnect headlight harness




5. Remove two 10mm headlight bolts



6. Remove headlight



7. Install new projector headlight

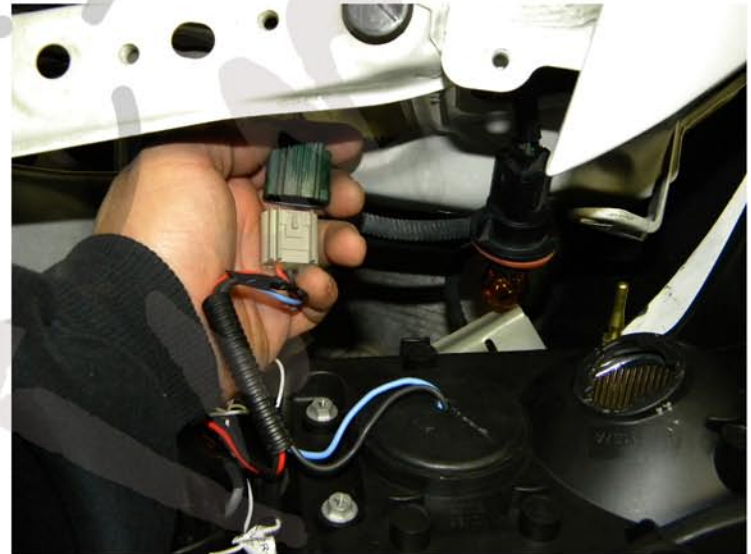

8. Connect all headlight harnesses



9. Install two 10mm headlight bolts



10. Install four clips



11. Please repeat the steps from 1 to 10 for opposite side



12. The installation is now complete

