

# Installation & CARE

## 2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Phillips Screwdriver	10 mm socket	Plastic Pry bar
			
Trim Pad Remover			
			

### PRODUCT NUMBER

LHP-MST05-G2-TM  
LHP-MST05JM-G2-TM  
LHP-MST05G-G2-TM




### LET'S START THE INSTALLATION



STEP 1

Remove the six plastic clips

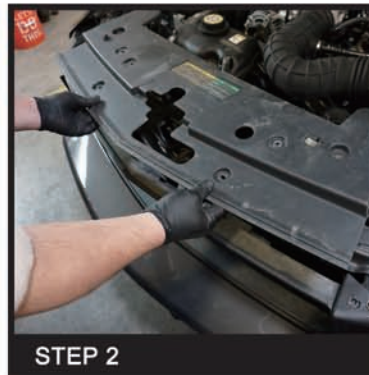

STEP 2

Remove the plastic radiator cover



STEP 3

Remove the three phillips screws and two plastic clips on the wheel inner liner cover



STEP 4

Remove the two front bumper light sockets and two 10mm front bumper mounting nuts



STEP 5

Remove the 10mm bumper mounting bolt at the top of the front bumper



STEP 6


Pull down on the side of the front bumper to unseat the front bumper



STEP 7

Unseat the top of the front bumper





**STEP 8**

Please repeat the steps from 3 to 7 for the opposite side



**STEP 9**

Remove the front bumper



**STEP 10**

Remove the two 10mm headlight mounting bolts at the bottom of the headlight



**STEP 11**

Remove one 10mm headlight mounting bolt at the top of the headlight



**STEP 12**

Disconnect the headlight harness and remove the factory headlight housing



**STEP 13**

Connect the headlight harness



**STEP 14**

Seat the new headlight assembly in place



**STEP 15**

Reinstall one 10mm headlight mounting bolt at the top of the headlight



**STEP 16**

Reinstall the two 10mm headlight mounting bolts at the bottom of the headlight




**STEP 17**

Install the wire connector to connect the LED light bar wires to the car position light



**STEP 18**

Please repeat the steps from 9 to 16 for the opposite side

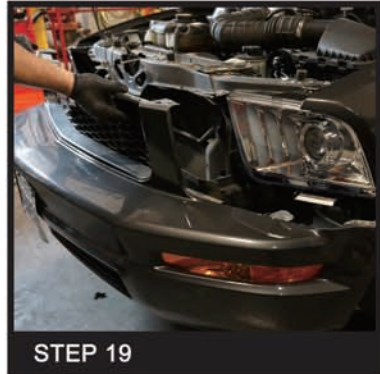

**STEP 19**

Reinstall the front bumper




**STEP 20**

Reinstall the 10mm bumper mounting bolt at the top of the front bumper



**STEP 21**

Reinstall the two front bumper light sockets and two 10mm front bumper mounting nuts

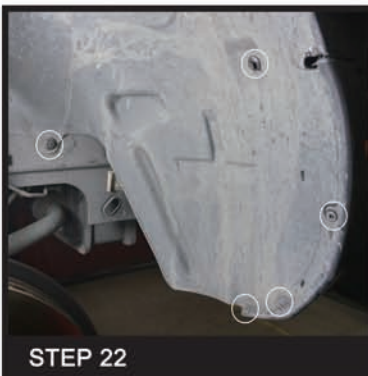

**STEP 22**

Reinstall the three phillips screws and two plastic clips on the wheel inner liner cover



**STEP 23**

Please repeat the steps from 20 to 22 for the opposite side



**STEP 24**

Reinstall the plastic radiator cover



**STEP 25**

Reinstall the six plastic clips



**STEP 26**

Close the hood to complete installation



# Installation & CARE

## 2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

## 2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### High / Low Beam Adjustment Screws

