



## INSTALLATION INSTRUCTIONS

Stilen Side Skirts

P/N KB21025

2013 SCION FR-S

### Materials supplied:

1. (2) Side Skirts
2. 16' Double-sided tape
3. (4) Screws

### Equipment needed:

1. Sandpaper/Scotch-Brite
2. Drill & Assorted Drill bits
3. Adhesive Promoter (optional)



**WARNING:**  
IF YOU ARE NOT EXPERIENCED IN THE AREA OF BODY  
REPAIR WE STRONGLY URGE THAT YOU REFER THIS  
INSTALLATION TO YOUR BODY SHOP.

**NOTE:** Preparation of the urethane surfaces to be painted is important to achieve proper fit and finish. However, these components are flexible and attention should be paid to the type of paint chosen for these applications.

### NOTES ABOUT INSTALLATION, CLEANING, AND PAINTING

Pre-fit all pieces to the vehicle (**Fig.1 & 2**). Once you are assured that you have the right aero kit, you may proceed. If you don't, please call *Stillen* right away. We highly recommend using masking tape anywhere the aero kit may be touching the vehicle body to prevent scratches during the pre-fit.

Do any sanding, filing, or spacing necessary (before painting) for a clean tight fit. Spending the extra time now will assure you of a perfect "factory" installation.



**FIGURE 1**



**FIGURE 2**

### PAINTING URETHANE

**Urethane components require a special cleaning and painting procedure to obtain a proper finish.** Once the urethane components have been properly pre-fitted **CLEAN AND SCRUB THEM!** Use plenty of hot water, plenty of scouring powder (like AJAX® or COMET®) and #7447 Scotch-Brite® pad. Scrub each piece thoroughly until there are no shiny spots. Scrub all surfaces especially the backside top sections that will be against the body. You will be applying double sided tape to this area so **clean and sand it!** The goal is to achieve an even dull finish on all surfaces to be painted. After you've finished scrubbing the parts completely repeat the procedure one more time. If this is not done properly the paint will not stick!

Any automotive primer will provide excellent adhesion to the part if the surface is properly prepared, however, **we do not recommend using lacquer primer on urethane components due to its rigidity**. Elastomeric or acrylic primers can be used but elastomeric primers, due to the flex agent added, are preferred over acrylic primers. Light sanding is recommended after primer has dried and before final color painting.

On all the *Stillen* urethane components, the preferred procedures are:

- A. Pre-fit, sand, and shape.
- B. Paint
- C. Install

### INSTALL

1. After the side skirts are prepped and painted, double-sided tape should be applied to the indentation on the inside of the side skirts. (**Fig.3**) This surface has to be CLEAN and DRY for the tape to properly adhere. A residual-free cleaner is recommended (e.g. Wurth™ Clean-Solve) to prepare the surface. The surface of the vehicle should also be prepped and cleaned for proper adhesion. (**Fig.4**) For BEST results after cleaning, an adhesion promoter such as 3M™ part 06396 should be applied to wherever tape will be used. We also recommend scuffing the paint where the tape will be adhering for best results. When applying tape, make sure that tape is smooth and wrinkle free.
2. After applying the tape, pull back approximately 1 inch of protective covering from the tape on each end. Make sure the film is sticking out. (**Fig.3**) Place the side skirt GENTLY on the vehicle and make sure you have it positioned correctly. If adhesion promoter was used you will NOT get a second chance! While holding it in position, pull the tabs you created while applying light downward pressure. (**Fig. 5 & 6**) Continue this taking care not to tear off the tabs by pulling too hard. After all the film is removed, apply firm pressure all around to insure the tape has bonded properly.
3. Drill 1 small pilot hole onto both ends of the side skirt and use the provided screws to secure the side skirt onto the vehicle (**Fig. 7**).




**FIGURE 3**



**FIGURE 4**



**FIGURE 5**

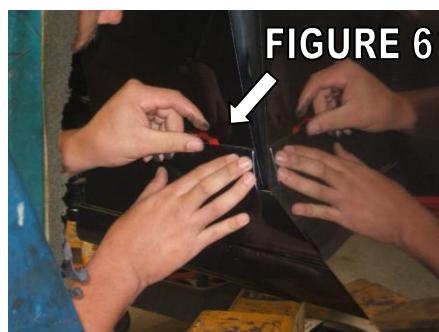

**FIGURE 6**



**FIGURE 7**

4. For the rear corners, you will need to remove the stock mudguards. Be sure to keep the screws you removed as they will be reused to secure the rear corners.
5. After the rear corner is prepped and painted, double-sided tape should be applied to the indentation on the inside of the rear corner. (**Fig.8**) This surface has to be CLEAN and DRY for the tape to properly adhere. A residual-free cleaner is recommended (e.g. Wurth™ Clean-Solve) to prepare the surface. The surface of the vehicle should also be prepped and cleaned for proper adhesion. (**Fig.9**) For BEST results after cleaning, an adhesion promoter such as 3M™ part #06396 should be applied to wherever tape is used. When applying tape, make sure that tape is smooth and wrinkle free. It is best to use multiple small pieces on long sections rather than 1 long piece.
6. After applying the tape, pull back approximately 1 inch of protective covering from the tape on each end. Make sure the film is sticking out. (**Fig.10**) Place the rear corner GENTLY on the vehicle and make sure you have it positioned correctly. If adhesion promoter was used you will NOT get a second chance! While holding it in position, pull the tabs you created while applying light downward pressure. Continue this taking care not to tear off the tabs by pulling too hard. After all the film is removed, apply firm pressure all around to insure the tape has bonded properly.
7. Re-use your stock screws to secure the ends of the rear corners.
8. Done! Enjoy the looks of your new *Stillen* side skirts.



**FIGURE 8**



**FIGURE 9**



**FIGURE 10**