

HTR ENHANCE CX2

PREMIUM TOURING SUV/CUV PERFORMANCE

The Enhance CX2 is the smart choice for SUV and CUV drivers seeking a tire that's tough enough to handle heavy loads, while still delivering dependable year-round performance.

FEATURES & BENEFITS

- > Sumitomo precision engineering tuned for SUV and crossover applications
- > 3D zig zag sipes boosts block stability and reduce irregular wear while creating more biting edges and improving winter performance
- > Optimized contact patch distributes pressure evenly to provide extended life of the tire
- > Cross-designed chamfer provides more biting edges to provide better winter performance
- > Bending sipes creates rigidity in center block to maintain stability and provide excellent highway response and driving characteristics



3D Zig Zag Sipes boost block stability and reduce irregular wear, while creating more biting edges and improving winter performance

Bending Sipe Technology creates rigidity in center block to maintain stability, while providing crisp highway response and driving characteristics

Optimized Contact Patch distributes road surface pressure evenly to provide extended tire life

Cross-Designed Chamfer boosts traction and grip for better winter and wet-surface performance

Outside Shoulder Blocks are enhanced with integral lateral grooves to provide better wet handling and reduce road noise

FITS

Modern Crossovers and SUVs

SIZES

T, H & V-rated in 16" - 20" and 22"

WARRANTY


65,000-Mile / 105,000-KM Treadwear for all sizes

2-Year, 24/7 Tire Roadside Assistance

1-Year Tire Road Hazard Protection Plan

45-Day Test Drive

Defect Replacement for the Life of Usable Tread

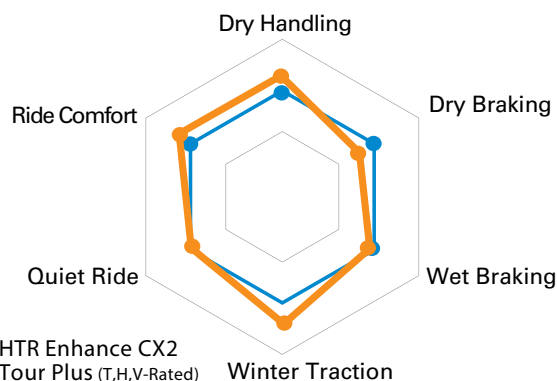

PREMIUM TOURING SUV/CUV PERFORMANCE

| Product Code | Tire Size | Load Range | Service Description | UTQG | Measuring Rim Width (in) | Approved Rim Width | | Maximum | | Overall Diameter (in) | Section Width (in) | Tread Width (in) | Static Loaded Radius (in) | Revs. Per. Mile | Tread Depth | Ship Weight (lbs) |
|--------------|------------|------------|---------------------|---------|--------------------------|--------------------|-----------|---------------|------------|-----------------------|--------------------|------------------|---------------------------|-----------------|-------------|-------------------|
| | | | | | | Min. (in) | Max. (in) | Air (lbs psi) | Load (lbs) | | | | | | | |
| ENC53 | 235/70R16 | SL | 106T | 680 A B | 7.0 | 6.0 | 8.0 | 51 | 2,094 | 29 | 9.4 | 7.4 | 13.0 | 729 | 11 | 31.3 |
| ENC54 | 245/65R17 | SL | 107H | 680 A A | 7.0 | 7.0 | 8.5 | 51 | 2,149 | 29.5 | 9.7 | 7.8 | 13.3 | 719 | 11 | 33.5 |
| ENC05 | 235/65R18 | SL | 106H | 680 A A | 7.0 | 6.5 | 8.5 | 51 | 2,094 | 30.0 | 9.4 | 7.5 | 13.6 | 705 | 11 | 34.4 |
| ENC32 | 255/65R18 | SL | 111T | 600 A B | 7.5 | 7.0 | 9.0 | 51 | 2,403 | 31.1 | 10.2 | 8.1 | 14.0 | 683 | 11 | 38.4 |
| ENC49 | 235/60R18 | XL | 107V | 600 A A | 7.0 | 6.5 | 8.5 | 50 | 2,149 | 29.1 | 9.4 | 7.8 | 13.2 | 726 | 11 | 32.2 |
| ENC68 | 245/60R18 | SL | 105H | 680 A A | 7.0 | 7.0 | 8.5 | 51 | 2,039 | 29.6 | 9.7 | 8.1 | 13.4 | 716 | 11 | 35.1 |
| ENC81 | 285/60R18 | XL | 120H | 600 A A | 8.5 | 8.0 | 10.0 | 50 | 3,086 | 31.5 | 11.4 | 9.4 | 14.1 | 677 | 11 | 43.4 |
| ENC36 | 255/55R18 | XL | 109V | 600 A A | 8.0 | 7.0 | 9.0 | 50 | 2,271 | 29.0 | 10.4 | 8.8 | 13.2 | 728 | 11 | 37.5 |
| ENC72 | 255/60R19 | SL | 109H | 680 A A | 7.5 | 7.0 | 9.0 | 51 | 2,271 | 31.1 | 10.2 | 8.4 | 14.1 | 680 | 11 | 36.8 |
| ENC86 | 235/55R19 | XL | 105V | 600 A A | 7.5 | 6.5 | 8.5 | 50 | 2,039 | 29.2 | 9.6 | 8.1 | 13.4 | 720 | 11 | 33.1 |
| ENC66 | 245/55R19 | SL | 103H | 680 A A | 7.5 | 7.0 | 8.5 | 51 | 1,929 | 29.6 | 9.9 | 8.5 | 13.5 | 711 | 11 | 34.4 |
| ENC02 | 235/50R19 | SL | 99V | 600 A A | 7.5 | 6.5 | 8.5 | 51 | 1,709 | 28.3 | 9.6 | 8.4 | 13.0 | 742 | 11 | 30.6 |
| ENC09 | 255/50R19 | XL | 107V | 600 A A | 8.0 | 7.0 | 9.0 | 50 | 2,149 | 29.1 | 10.4 | 9.1 | 13.3 | 723 | 11 | 34.2 |
| ENC03 | 235/55R20 | SL | 102H | 680 A A | 7.5 | 6.5 | 8.5 | 51 | 1874 | 30.2 | 9.6 | 8.1 | 13.9 | 697 | 11 | 34.2 |
| ENC04 | 255/55R20 | XL | 110H | 600 A A | 8.0 | 7.0 | 9.0 | 50 | 2337 | 31.0 | 10.4 | 8.8 | 14.2 | 680 | 11 | 38.6 |
| ENC80 | 245/50R20 | SL | 102V | 600 A A | 7.5 | 7.0 | 8.5 | 51 | 1874 | 29.7 | 9.9 | 8.8 | 13.7 | 708 | 11 | 34.4 |
| ENC84 | 255/50R20 | XL | 109V | 600 A A | 8.0 | 7.0 | 9.0 | 50 | 2271 | 30.1 | 10.4 | 9.1 | 13.8 | 699 | 11 | 35.1 |
| ENC85 | 265/50R20 | XL | 111V | 600 A A | 8.5 | 7.5 | 9.5 | 50 | 2403 | 30.5 | 10.8 | 9.5 | 14.0 | 690 | 11 | 38.1 |
| ENC24 | 305/50R20 | XL | 120H | 600 A A | 9.5 | 8.5 | 11.0 | 50 | 3086 | 32.0 | 12.4 | 10.9 | 14.6 | 659 | 12 | 51.0 |
| ENC11 | 275/45R20 | XL | 110H | 600 A A | 9.0 | 8.5 | 10.5 | 50 | 2337 | 29.8 | 10.7 | 9.5 | 13.7 | 701 | 11 | 35.7 |
| ENC21 | P295/45R20 | XL | 114H | 600 A A | 10.0 | 9.5 | 11.0 | 50 | 2601 | 30.5 | 11.6 | 10.2 | 14.0 | 685 | 11 | 40.8 |
| ENC07 | 285/45R22 | XL | 114H | 600 A A | 9.5 | 9.0 | 10.5 | 50 | 2601 | 32.1 | 11.1 | 9.9 | 14.8 | 648 | 11 | 45.8 |
| ENC25 | P305/45R22 | XL | 118H | 600 A A | 10.0 | 9.5 | 11.5 | 50 | 2910 | 32.8 | 11.9 | 10.6 | 15.1 | 635 | 12 | 50.7 |
| ENC06 | 265/40R22 | XL | 106H | 680 A A | 9.5 | 9.0 | 10.5 | 50 | 2094 | 30.4 | 10.6 | 9.4 | 14.2 | 683 | 11 | 37.3 |
| ENC27 | 305/40R22 | XL | 114H | 600 A A | 11.0 | 10.0 | 12.0 | 50 | 2601 | 31.6 | 12.2 | 10.8 | 14.6 | 658 | 11 | 46.2 |

SUENHCX2PS - 1120

Every effort has been made to verify the accuracy of the listed specifications.

TBC Corporation and TBC Brands cannot be held responsible for any discrepancies, and as such, the information should be considered as approximate.

Learn more about tires on our website.