



**SUPERLIFT<sup>®</sup>**  
S U S P E N S I O N

## 2015 - 2016 FORD F150 4.5" and 6" INSTALLATION INSTRUCTIONS





# **SUPERLIFT®**

S U S P E N S I O N

## **2015 - 2016 FORD F150 4.5" and 6" INSTALLATION INSTRUCTIONS**

**THANK YOU FOR CHOOSING SUPERLIFT FOR ALL YOUR SUSPENSION NEEDS!!**

### **INTRODUCTION**

Installation requires a professional mechanic.

Prior to beginning, inspect the vehicles steering, driveline, and brake systems, paying close attention to the suspension link arms and bushings, sway bars and bushings, tie rod ends, pitman arm, ball joints and wheel bearings. Also check the steering sector-to-frame and all suspension-to-frame attaching points for stress cracks. The overall vehicle must be in excellent working condition; repair or replace all worn parts.

**Read instructions several times before starting. Be sure you have all needed parts and know where they install. Read each step completely as you go.**

### **NOTES:**

- Prior to beginning the installation, check all parts and hardware in the box with the parts list below. If you find a packaging error, contact Superlift® directly. Do not contact the dealer where the system was originally purchased. You will need the control number from each box when calling; this number is located at the bottom of the part number label and to the right of the bar code.
- Front end alignment is necessary.
- A foot-pound torque reading is given in parenthesis ( ) after each appropriate fastener.
- Tool and Wrench/Socket size is given in brackets { } after each appropriate step.
- Prior to attaching components, be sure all mating surfaces are free of grit, grease, excessive undercoating, etc.
- A factory service manual should be on hand for reference.
- Vehicles equipped with a two piece rear driveshaft will need to order an additional kit box 9935 for the carrier bearing shims.
- Use the check-off box "☐" found at each step to help you keep your place. Two "☐☐" denotes that one check-off box is for the driver side and one is for the passenger side. Unless otherwise noted, always start with the driver side.

### 9930 (4.5" F150 KIT) TIRE / WHEEL RECCOMENDATIONS

Wheel					Maximum Recomend Tire Size				
	Diameter	Width	Backspace	Offset (mm)	Diameter	Section Width	*Printed Size*	Manufacturer	Series
OEM	18	7.5	5.5	44	32.5	11.2	275/65R18	GOODYEAR	WRANGLER
	18	7.5	5.5	44	35.0	12.0			
	18	9	5.3	19	35.0	12.5			
	18	9	5.0	13	34.0	13.0			
	18	9	4.5	0	33.0	14.0			
OEM	20	8.5	6.0	44	31.9	11.2	275/55R20	MICHELIN	LTX
	20	8.5	6.0	44	35.0	11.3			
	20	9	5.5	25	35.0	12.3			
	20	9	5.0	13	34.0	13.3			
	20	9	4.5	0	33.0	14.3			

*\*Note: The printed size is just for reference. Final tire selection should be based on the diameter and section width of the tires as published by the tire manufacturer.\**

*\*\*Denotes wheel and tire combimation used during development.*

### 9930 (6" F150 KIT) TIRE / WHEEL RECCOMENDATIONS

Wheel					Maximum Recomend Tire Size				
	Diameter	Width	Backspace	Offset (mm)	Diameter	Section Width	*Printed Size*	Manufacturer	Series
OEM	18	7.5	5.5	44	32.5	11.2	275/65R18	GOODYEAR	WRANGLER
	18	7.5	5.5	44	36.0	12.0			
	18	9	5.3	19	36.0	13.0			
	18	9	5.0	13	36.0	13.5			
	18	9	4.5	0	36.0	14.5			
OEM	20	8.5	6.0	44	31.9	11.2	275/55R20	MICHELIN	LTX
	20	8.5	6.0	44	36.0	11.3			
	20	9	5.5	25	36.0	12.3			
	20	9	5.0	13	36.0	13.3			
	20	9	4.5	0	35.0	14.3			
**	20	9	4.5	0	35.5	12.5	LT295/65R20	NITTO	TRAIL GRAPPLER
**	20	10	4.3	-19	35.0	12.8	35x12.50R20	NITTO	TRAIL GRAPPLER

*\*Note: The printed size is just for reference. Final tire selection should be based on the diameter and section width of the tires as published by the tire manufacturer.\**

*\*\*Denotes wheel and tire combimation used during development.*

Misc. Tools	Wrench / Socket Sizes	
	Standard	Metric
floor jack		
jack stands	3/8"	8mm
flathead screwdriver	7/16"	10mm
hammer	1/2"	13mm
plastic fastener removal tool	9/16"	15mm
die grinder w/cut-off wheel	5/8"	18mm
torque wrench	3/4"	19mm
drill	13/16"	21mm
drill bits - 7/32", 9/32", & 11/32"	7/8"	27mm
		8mm allen
		5mm allen

Kit Part Number K102 4.5" Lift Kit			Kit Part Number K102B 4.5" Lift Kit		
Part Number	Qty.	Part Description	Part Number	Qty.	Part Description
9930	1	knuckle kit box	9930	1	knuckle kit box
9931	1	crossmember kit box	9931	1	crossmember kit box
9932	1	differential brackets and shock kit box	9932B	1	differential brackets and shock kit box
9934	1	strut spacer kit box	9934	1	strut spacer kit box
<b>OR</b>			<b>OR</b>		
Kit Part Number K103 6" Lift Kit			Kit Part Number K103B 6" Lift Kit		
Part Number	Qty.	Part Description	Part Number	Qty.	Part Description
9930	1	knuckle kit box	9930	1	knuckle kit box
9931	1	crossmember kit box	9931	1	crossmember kit box
9932	1	differential brackets and shock kit box	9932B	1	differential brackets and shock kit box
9933	1	strut spacer kit box	9933	1	strut spacer kit box

Kit Part Number 9930			Kit Part Number 9934 4.5" Lift Kit		
Part Number	Qty.	Part Description	Part Number	Qty.	Part Description
66-01-9930	1	knuckle, driver	10342	4	9/16" x 3-5/16" x 10" ubolts
66-02-9930	1	knuckle, passenger	55-11-9930	2	strut spacers (4.5")
<b>OR</b>			77-1509	1	ubolt nuts and washers
Kit Part Number 9931			Kit Part Number 77-9930		
Part Number	Qty.	Part Description	Part Number	Qty.	Part Description
55-05-9930	1	crossmember, front	01-60418	4	01-60418, hourglass bushing
55-06-9930	1	crossmember, rear	21-3205	1	5/16" x 3-1/2" vacuum hose
55-07-9930	1	sway bar drop, driver	23-3205	1	5/16" hose adapter
55-08-9930	1	sway bar drop, passenger	24-5704	4	24-5704, 0.75" OD x 0.50" ID x 1.54" L, sleeve
55-10-9930	1	belly pan	55-16-9910	1	brake line bracket, rear
77-9931	1	hardware bag, cam bolts	55-18-9910	1	brake line bracket, front passenger
<b>OR</b>			55-19-9910	1	brake line bracket, front driver
Kit Part Number 9932			Kit Part Number 77-9931		
Part Number	Qty.	Part Description	Part Number	Qty.	Part Description
01-85150	2	shock cylinder, Superide rear	55-20-9930	4	cam bolt
55-03-9930	1	differential drop, driver	<b>OR</b>		
55-04-9930	1	differential drop, passenger	Kit Part Number 77-9932		
55-12-9930	2	bump stop, rear	Part Number	Qty.	Part Description
55-30-9930	2	block, rear	10MFX	6	10mm flange nut
66-11-9910	1	driveshaft spacer, front	10MFW	2	10mm flat washer
77-9930	1	hardware bag, SL parts	10MX1.5X150CS	2	10mm x 1.5 x 150mm bolt
77-9932	1	hardware bag, nuts and bolts	10MX1.5X90SHB	6	10mm x 1.5 x 90mm bolt, socket head
<b>OR</b>			14X12STB	2	1/4" x 1/2" bolt, self-tapping
Kit Part Number 9932B			18MFW	8	18mm flat washer
Part Number	Qty.	Part Description	18MLN	6	18mm stover nut
55-03-9930	1	differential drop, driver	18MX2.5X150CS	2	18mm x 2.5 x 150mm bolt
55-04-9930	1	differential drop, passenger	38C5FN	4	3/8" flange nut
55-12-9930	2	bump stop, rear	38X1C5CB	4	3/8" x 1" carriage bolt, coarse thread
55-30-9930	2	block, rear	516C5NN	2	5/16" nyloc nut
66-11-9910	1	driveshaft spacer, front	516C8SN	1	5/16" stover nut
77-9930	1	hardware bag, SL parts	516SW	3	5/16" sae washer
77-9932	1	hardware bag, nuts and bolts	516X1C5CS	1	5/16" x 1" bolt, coarse thread
BE5-6249-H5	2	shock cylinder, Bilstein rear	516X1STB	1	5/16" x 1" bolt, self tapping
<b>OR</b>			516X34C5CS	2	5/16" x 3/4" bolt, coarse thread
Kit Part Number 9933 6" Lift Kit			716C8SN	4	7/16" stover nut
Part Number	Qty.	Part Description	716SW	4	7/16" sae washer
10352	4	9/16" x 3-5/16" x 11" ubolts	716X1C5CS	4	7/16" x 1" bolt, coarse thread
55-09-9930	2	strut spacers (6")	916C8SN	3	9/16" stover nut
77-1509	1	ubolt nuts and washers	916SW	3	9/16" sae washer
<b>OR</b>			916X334C5CS	3	9/16" x 3-3/4" bolt, coarse thread
<b>OR</b>			F470L	2	F470L, thread locker

Step	Part Number	Qty. per Kit	Description	New Attaching Hardware	Qty. per Bracket	Hardware Bag Number
21	55-03-9930	1	differential drop, driver	9/16" x 3-3/4" bolt, coarse thread	1	77-9932
				9/16" sae washer	1	
				9/16" stover nut	1	
21	55-04-9930	1	differential drop, passenger	9/16" x 3-3/4" bolt, coarse thread	1	77-9932
				9/16" sae washer	1	
				9/16" stover nut	1	
21	21-3205	1	5/16" x 3-1/2" vacuum hose			77-9930
21	23-3205	1	5/16" hose adapter			
22	55-07-9930	1	sway bar drop, driver	7/16" x 1" bolt, coarse thread	2	77-9932
				7/16" sae washer	2	
				7/16" stover nut	2	
22	55-08-9930	1	sway bar drop, passenger	7/16" x 1" bolt, coarse thread	2	77-9932
				7/16" sae washer	2	
				7/16" stover nut	2	
23	55-06-9930	1	crossmember, rear	9/16" x 3-3/4" bolt, coarse thread	1	77-9932
				9/16" sae washer	1	
				9/16" stover nut	1	
				18mm stover nut	4	
				18mm flat washer	6	
				18mm x 2.5 x 150mm, bolt	2	
				55-20-9930, cam bolt	2	
25	55-05-9930	1	crossmember, front	55-20-9930	2	77-9931
				18mm stover nut	2	77-9932
				18mm flat washer	2	
28	55-10-9930	1	belly pan	3/8" x 1" carriage bolt, coarse thread	4	77-9932
				3/8" flange nut	4	
29	66-11-9910	1	driveshaft spacer, front	10mm x 1.5 x 90mm bolt, socket head	6	77-9932
				F470L, thread locker	1	
31	55-09-9930	2	strut spacer (6") OR	10mm flange nut	3	77-9932
				55-11-9930	2	
33	66-01-9930	1	knuckle, driver	F470L, thread locker	0.5	77-9932
33	66-02-9930	1	knuckle, passenger	F470L, thread locker	0.5	77-9932
41	55-19-9910	1	brake line bracket, front driver	5/16" x 3/4" bolt, coarse thread	1	77-9932
				5/16" nyloc nut	1	
				5/16" sae washer	1	
				1/4" x 1/2" bolt, self-tapping	1	
41	55-18-9910	1	brake line bracket, front passenger	5/16" x 3/4" bolt, coarse thread	1	77-9932
				5/16" nyloc nut	1	
				5/16" sae washer	1	
				1/4" x 1/2" bolt, self-tapping	1	
54	55-30-9930	2	block, rear (6")	9/16" x 3-5/16" x 11" ubolt, square	4	77-1509
				9/16" high nut, fine thread	8	
				9/16" ubolt washer	8	
54	55-30-9930	2	block, rear (4.5")	9/16" x 3-5/16" x 10" ubolt, square	4	77-1509
				9/16" high nut, fine thread	8	
				9/16" ubolt washer	8	
55	55-16-9910	1	brake line bracket, rear	5/16" x 1" bolt, coarse thread	1	77-9932
				5/16" stover nut	1	
				5/16" sae washer	1	
				5/16" x 1" bolt, self tapping	1	
58	01-85150	2	shock cylinder, Superide rear OR	01-60418, hourglass bushing	2	77-9930
				24-5704, 0.75" OD x 0.50" ID x 1.54" L, sleeve	2	
				58 BE5-6249-H5	2	
59	55-12-9930	2	bump stop, rear	24-5704, 0.75" OD x 0.50" ID x 1.54" L, sleeve	2	
				10mm x 1.5 x 150mm, socket bolt	1	77-9932
			10mm flat washer	1		

# **FRONT DISASSEMBLY**

**NOTE:** Save all factory components and hardware for reuse, unless noted.


## **1) PREPARE VEHICLE...**

☐☐ Chock rear tires and place transmission in neutral. Raise front of vehicle with a jack and secure a jack stand beneath each frame rail. Ease the frame down onto the stands and place transmission in park. Remove front tires. {Lug Nuts 21mm}

## **2) SWAY BAR LINKS...**

☐☐ [Illustration 1] Disconnect the lower end of the sway bar links from the lower control arm. {18mm}

**Illustration 1**

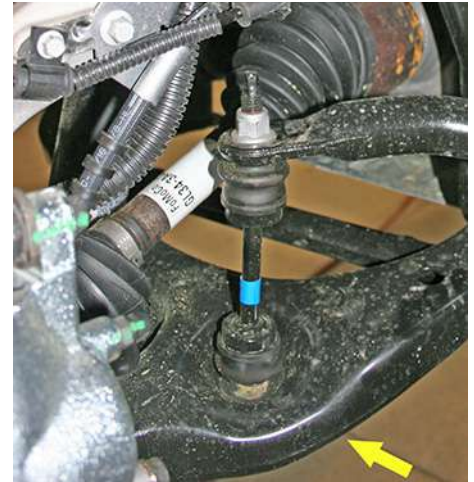

**Perform steps 3 through 14 one side at a time.**

## **3) STEERING TIE ROD END...**

☐☐ [Illustration 2] Remove the nut from the tie rod end and using the appropriate puller tool remove tie rod from knuckle. If you do not have a puller tool you can use a hammer by very carefully striking the tie rod boss of the knuckle; do not strike the tie rod end. {21mm}

**Illustration 2**




## **4) BRAKE LINE BRACKET AND ABS SENSOR WIRE...**

☐☐ [Illustration 3] Unclip the vacuum lines from the brake line bracket. {plastic fastener removal tool}

☐☐ [Illustration 4] Locate the brake line bracket on the steering knuckle and remove. {10mm}

☐☐ [Illustration 4] Remove the ABS sensor wire from the steering knuckle. {8mm}

**Illustration 3**

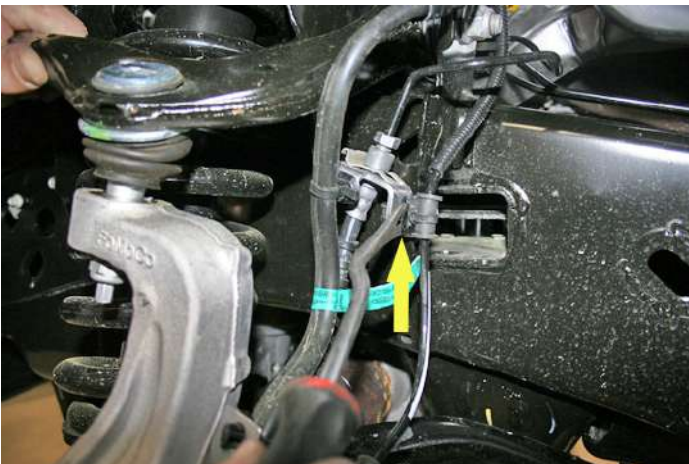

**Illustration 4**




## 5) BRAKE CALIPER...

□□ [Illustration 5] Unbolt the brake caliper and remove from the rotor and secure it away from the work area. NOTE: Do not let calipers hang from brake lines. {21mm}

□□ Remove the front rotor from the hub.

**Illustration 5**

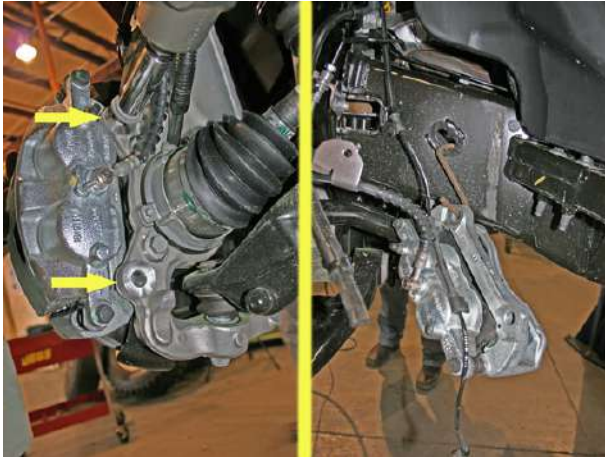

**Illustration 6**



## 6) CV SHAFT NUT...

□□ [Illustration 6] Remove the CV shaft dust cap from the outside of the hub assembly. Remove the retaining nut from the CV shaft. {flathead screwdriver, hammer, 15mm}


## 7) DUST SHIELD...

□□ [Illustration 7] Remove the three bolts holding the dust shield on the knuckle. {8mm}

## 8) ABS SENSOR AND VACUUM LINES...

□□ [Illustrations 8 & 9] Remove the ABS sensors from the top of the hub assembly, and vacuum lines from the vacuum module. {5mm allen, plastic fastener removal tool}

**Illustration 7**

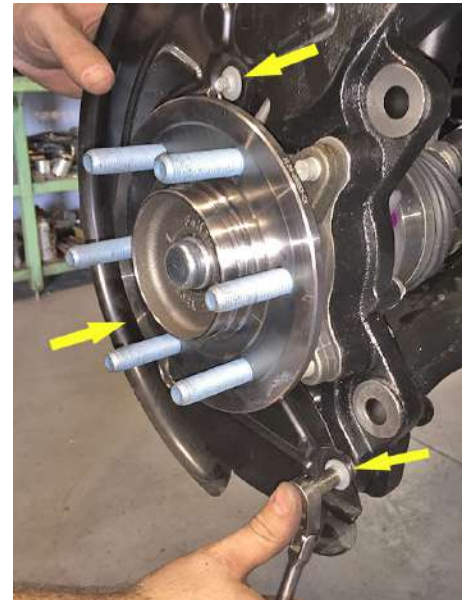

**Illustration 8**



**Illustration 9**



### 9) UPPER CONTROL ARM...

□□ [Illustration 10] Loosen, but do not remove, the four upper control arm bolts (2 per side). {bolt 18mm, nut 21mm}

### 10) KNUCKLE...

□□ [Illustrations 11 & 12] Remove the nuts from the upper and lower ball joints then using the appropriate puller tool, disconnect the ball joints from the knuckle. If you do not have a puller tool you can use a hammer by very carefully striking the ball joint boss' of the knuckle; do not strike the ball joints. Remove knuckle from vehicle. {upper ball joint 18mm, lower ball joint 21mm}

Illustration 10



Illustration 11



Illustration 12



### 11) BRAKE LINE BRACKET...

□□ [Illustration 13] Locate the brake line bracket on the side of the upper control arm mount and remove. {10mm}

### 12) LOWER CONTROL ARM...

□□ [Illustration 14] Loosen but do not remove the four lower control arm bolts (2 per side). {bolt 21mm, nut 27mm}

Illustration 13



Illustration 14





### 13) STRUT...

- [Illustration 15] Remove the two nuts from the lower strut studs and let the lower control arm swing out of the way. {18mm}
  
- [Illustration 16 & 17] Remove the three nuts from the top of the strut and remove the strut from the vehicle. {18mm}

### 14) LOWER CONTROL ARM...

- [Illustration 18] Remove the lower control arm's bolts then remove the lower control arm.

**Illustration 15**



**Illustration 16**



**Illustration 17**



**Illustration 18**



Repeat steps 3 through 14 on the remaining side.

### 15) FRONT DIFFERENTIAL SKID PLATE...

- [Illustration 19] If equipped, remove the factory front differential skid plate and discard. {13mm}

### 16) DRIVESHAFT...

- [Illustration 20] Mark the orientation of the front driveshaft, then disconnect from the differential; secure the driveshaft up and out of the way, do not let it hang. Discard the bolts and washer plates. {10mm}

Illustration 19



Illustration 20



### 17) SWAY BAR BODY...

- [Illustration 22] Remove four nuts retaining the sway bar body, then remove the sway bar from the vehicle. {15mm} Remove the stud plates from each side and retain for later use.

### 18) REAR CROSSMEMBER...

- [Illustration 23] Remove the four bolts securing the rear crossmember and remove the rear crossmember. {bolt 15mm, nut 18mm}

Illustration 22



Illustration 23



### 19) DIFFERENTIAL REMOVAL...

- Disconnect vacuum line from differential located on the top of the center section towards the middle of the vehicle.
- [Illustrations 24, 25, and 26] Support the differential with a jack and remove the rear driver's side differential bolt, then remove the two front bolts. {driver's side rear bolt 21mm, driver's side front bolt 18mm, passenger's side bolt 18mm}
- Carefully remove differential assembly.


**Illustration 24**



**Illustration 25**



**Illustration 26**

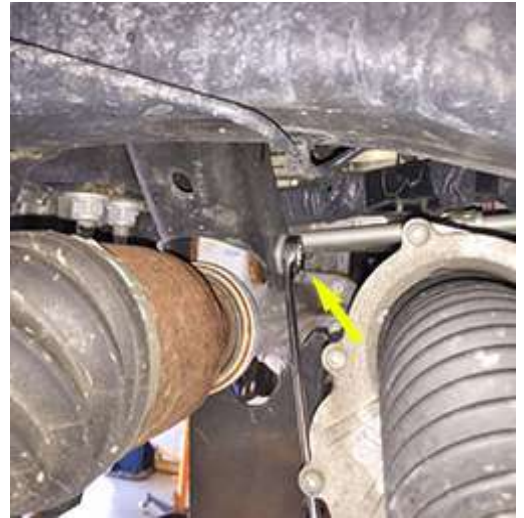

**20) TRIMMING LOWER CONTROL ARM MOUNT...**

□ [Illustrations 27 thru 32] The factory driver's side rear lower control arm mount must be trimmed as shown. Start on the rear side and measure from inside of the bracket out 5-1/2" and mark. Using a square mark a line up and over the bracket maintaining the 5-1/2" distance from the inside edge. Cut the bracket along the marked lines using a cut-off wheel or Sawz-All.

□□ After cutting, clean and paint all exposed areas.

**Illustration 27**



**Illustration 28**



**Illustration 29**



**Illustration 30**



Illustration 31



Illustration 32



## **FRONT ASSEMBLY**

### **21) DIFFERENTIAL INSTALLATION...**

- [Illustration 33] Loosely attach the driver side front differential drop bracket (55-03-9930) to the differential using the supplied 9/16" x 3-3/4" hardware; install bolt from front. Do not tighten. **NOTE:** The offset will face the front of the vehicle. The 55-03-9930 bracket does not have notches in the top.
- [Illustration 34] Loosely attach the passenger side differential drop bracket (55-04-9930) to the frame using the factory hardware; install bolt from front. Do not tighten. **NOTE:** The offset will face the front of the vehicle. The 55-04-9930 bracket has notches in the top.

Illustration 33



Illustration 34



- [Illustrations 35 & 36] Position the front driver differential bracket into the frame using the factory hardware; install bolt from front, then pivot the differential into the passenger side differential bracket and secure using the supplied 9/16" x 3-3/4" bolts, washer, and nut; install bolt from rear. Do not tighten.

Illustration 35



Illustration 36



□ [Illustration 37] Attach the hose adapter to the new vacuum hose, then attach the hose adapter to the factory hose. Connect the new hose to the differential.

## 22) SWAY BAR BRACKETS...

□□ [Illustration 38] Position the sway bar brackets (55-07-9930 driver; 55-08-9930 passenger) on the frame using the supplied 7/16" x 1" bolts, washers, and nuts. Do not tighten.

**Illustration 37**



**Illustration 38**



## 23) REAR CROSSMEMBER...

□□ [Illustration 39] Raise the rear crossmember (55-06-9930) into position. Secure it to the frame using the supplied 18mm x 150mm bolts, washers, and nuts; install bolts from rear.

## 24) DIFFERENTIAL REAR MOUNT...

□ [Illustration 40] Install the supplied 9/16" x 3-3/4" bolt, washer, and nut from the rear, through the sway bar bracket, differential rear mount and the rear crossmember. Do not tighten.

**Illustration 39**



**Illustration 40**



## 25) FRONT CROSSMEMBER...

□□ [Illustration 41] Position the front crossmember (55-05-9930) into the frame using the factory hardware; install bolts from front. Do not tighten.

## 26) LOWER CONTROL ARMS...

□□ [Illustration 42] Install the lower control arms into the new crossmembers with the supplied align-

ment cam bolts and nuts. Make sure the cam washers fit between the control tabs on the crossmembers. The cam washer should be in the up or neutral position. Snug but do not tighten. {27mm}

**Illustration 41**



**Illustration 42**



## **27) TIGHTEN THESE FASTENERS...**

Tighten these bolts in this order. Refer back to the illustrations listed if needed.

- [Illustration 38] Snug sway bar drop brackets to frame; do not tighten. {bolt 5/8", nut 11/16"}
- [Illustration 39] Rear crossmember mounting bolts to frame. (280) {27mm}
- [Illustration 40] Differential rear mounting bolt to rear crossmember. (105) {bolt 13/16", nut 7/8"}
- [Illustration 34 & 35] Front differential brackets to frame. (130) {18mm}
- [Illustration 35 & 36] Front differential brackets to differential. (105) {bolt 13/16", nut 7/8"}
- [Illustration 38] Sway bar brackets to frame. (50) {bolt 5/8", nut 11/16"}
- [Illustration 41] Front crossmember to frame (280) {bolt 21mm, nut 27mm}

## **28) BELLY PAN...**

- [Illustration 43] Install the belly pan (55-10-9930) to the front and rear crossmembers using the supplied 3/8" x 1" bolts and nuts. Tighten (23) {9/16"}

**Illustration 43**



## **29) FRONT DRIVESHAFT...**

- [Illustration 44] Install the front driveshaft spacer (66-11-9910). Apply thread locker to the supplied 10mm x 90mm socket head bolts and install making sure that the orientation marks that were made previously are aligned. Tighten (63) {8mm allen}

## **30) SWAY BAR...**

- [Illustration 45] Attach the sway bar body to the new drop brackets using the factory hardware. Tighten (55) {15mm}

**Perform steps 31 through 42 one side at a time.**

**Illustration 44**



**Illustration 45**



**31) STRUT SPACERS...**

□□ [Illustration 46] Position the strut spacers (4.5" lift = 55-11-9930 or 6" lift = 55-09-9930) to the top of the factory strut and fasten using the factory hardware. Tighten (55) {18mm}

**32) STRUTS...**

□□ [Illustration 47] Install the strut assembly into the strut mount and attach using the supplied 10mm flange nut, start nut but do not tighten.

□□ [Illustration 48] Re-attach the lower strut mount to the lower control arm using the factory hardware and tighten. (80) {18mm}

□□ [Illustration 49] Tighten the three top strut spacer 10mm flange nuts. (55) {15mm}

**Illustration 46**



**Illustration 47**



**Illustration 48**




**Illustration 49**



### 33) HUB ASSEMBLY AND VACUUM MODULE...

□□ [Illustration 50 & 51] On the factory knuckle, note the orientation of the vacuum module, and hub assembly, then remove them from the factory knuckle.

**Illustration 50**

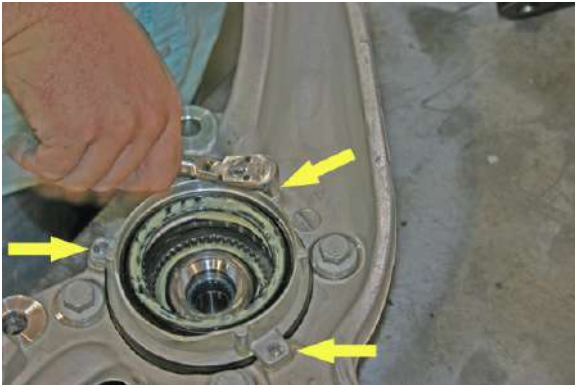

**Illustration 51**



□□ [Illustration 52] Install the new knuckle (66-01-9930 driver's side and 66-02-9930 passenger's side) onto the hub bearing assembly. Apply thread locker to the factory hardware and install bolts; tighten. (151) {18mm}

□□ [Illustration 53] Position the vacuum assembly on the knuckle and secure using the factory hardware; tighten. (10) {8mm}

**Illustration 52**



**Illustration 53**



### 34) LOWER BALL JOINT...

□□ [Illustration 54] Position the new knuckles on the lower control arm ball joint while sliding the CV shaft into the new knuckle. Install the factory nut onto the lower control arm ball joint. Tighten lower ball joint nut. (111) {21mm}

### 35) CV SHAFT...

□□ [Illustration 55 & 56] Pay close attention to the CV shaft engagement and make sure it is fully seated in the hub assembly, install the factory nut and tighten. (20) {15mm} Install dust cap.

**Illustration 54**






**Illustration 55**



**Illustration 56**

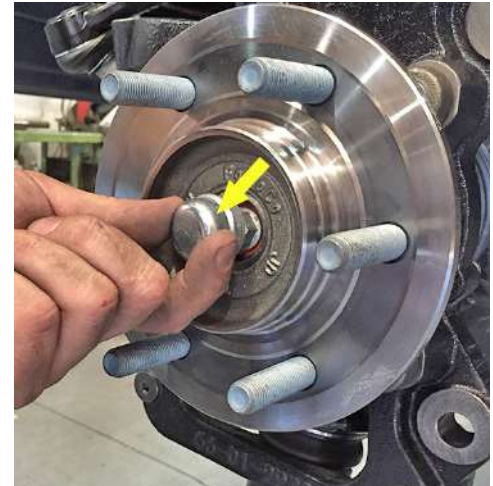

**36) UPPER BALL JOINT...**

- [Illustration 57] Attach the upper ball joint to the knuckle and tighten. (103) {18mm}


**37) ABS SENSOR AND VACUUM LINES...**

- [Illustration 58] Connect the ABS sensor to the hub assembly and tighten. (1) {5mm allen}
- [Illustration 59] Connect the vacuum lines to the vacuum module.

**Illustration 57**



**Illustration 58**

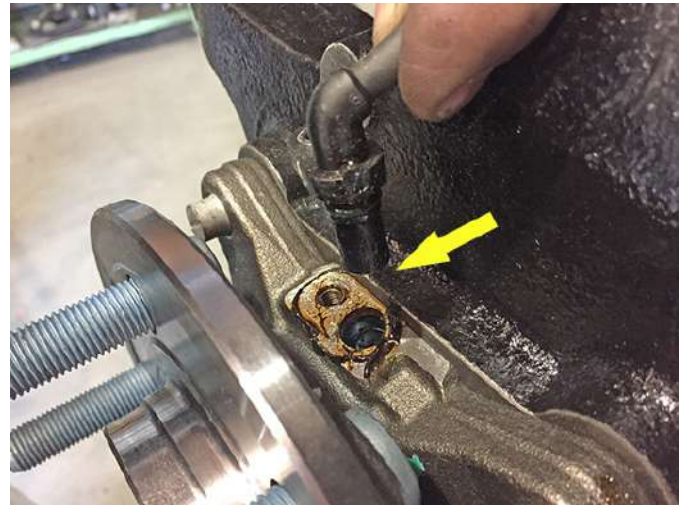

**38) DUST SHIELD, ...**

- [Illustration 60] Install the dust shield and secure using the factory hardware; tighten. (7.5) {8mm}

**39) BRAKE CALIPERS...**

- Install the rotor; installing a factory lug nut will help hold the rotor in position to install the caliper.
- [Illustration 61] Apply thread locker to the factory bolts then position the caliper over the rotor and install the factory hardware and tighten. (159) {21mm}

**Illustration 59**



**Illustration 60**



**Illustration 61**



**Illustration 62**



**40) STEERING TIE ROD END...**

□□ [Illustration 62] Attach the tie rod end to the knuckle; tighten. (136) {21mm}

**41) BRAKE LINE BRACKETS...**

□□ [Illustration 63] Install the new brake line brackets (55-19-9910 driver's side and 55-18-9910 passenger's side) on the frame using the factory hardware. (18) {10mm}

**Illustration 63**



□□ [Illustration 63 & 64] Use the bracket as a template to drill a 7/32" hole and install the 1/4" x 1/2" self-tapping bolt. (6.3) {3/8"}


□□ [Illustration 65] Carefully bend the brake lines to re-attach the factory brake line bracket to the new one using the supplied 5/16" x 3/4" bolt, washer, and nut. (13) {1/2"} Do not kink the lines.

□□ [Illustration 66] Connect brake line bracket to the steering knuckle using the factory hardware. (18) {10mm}

**Illustration 64**



**Illustration 65**

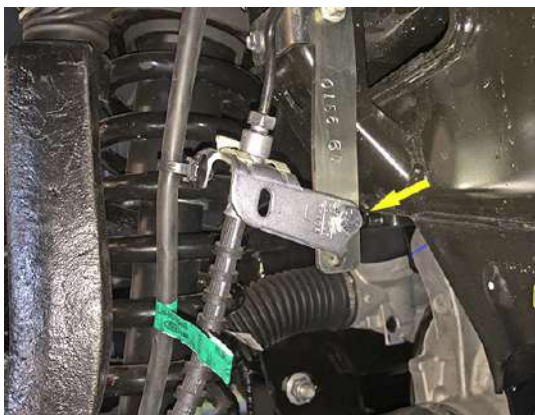

**Illustration 66**



#### 42) ABS SENSOR WIRE...

- [Illustration 66] Connect the ABS sensor wire to the knuckle using the factory hardware. (9) {8mm} Make sure the wire is positioned below the bolt.

Perform step 31 through 42 on the remaining side.

#### 43) SWAY BAR LINKS...

- [Illustration 67] Connect the sway bar links to the lower control arm; tighten. (63) {15mm}

#### 44) TIRES / WHEELS...

- Install tires and wheels. Tighten the lug nuts in the sequence shown on “Lug Nut Torque Sequence”. (151) {21mm}

WARNING: When the tires / wheels are installed, always check for and remove any corrosion, dirt, or foreign material on the wheel-mounting surface, or anything that contacts the wheel-mounting surface (hub, rotor, etc.). Installing wheels without the proper metal-to-metal contact at the wheel mounting surfaces can cause the lug nuts to loosen and the wheel to come off while the vehicle is in motion. WARNING: Retighten lug nuts at 500 miles after any wheel change, or anytime the lug nuts are loosened. Failure to do so could cause wheels to come off while vehicle is in motion.

- Lower vehicle to the floor. The suspension is now supporting vehicle weight.

#### 45) LOWER CONTROL ARM...

- [Illustration 68] Tighten the four lower control arm bolts (2 per side); keep the alignment cams in the up (neutral) position until the alignment is performed. (240) {27mm}

#### 46) UPPER CONTROL ARM...

- [Illustration 69] Tighten the four upper control arm bolts (2 per side). (151) {bolt 18mm, nut 21mm}

#### 47) CLEARANCE CHECK...

- With the vehicle on the ground, cycle the steering lock-to-lock and check all components for proper operation and clearances. Pay special attention to the clearance between the tires / wheels and knuckles, brake hoses, wiring, etc.

- Raise the vehicle back onto jack stands and secure as per step 1. With the suspension “hanging” at full extension travel, cycle the steering lock-to-lock and check all components for proper operation and clearances. Pay special attention to the clearance between the tires / wheels and knuckles, brake hoses, wiring, etc. Lower the vehicle to the floor.

Illustration 67

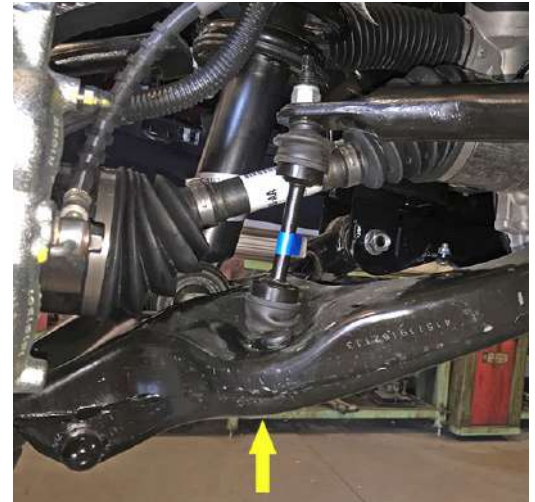


Illustration 68



Illustration 69



## **REAR DISASSEMBLY**

### **48) RAISE REAR OF VEHICLE...**

Chock the front tires. Position a jack beneath the center of the rear axle then raise rear of vehicle. Secure jack stands beneath the frame rails just forward of the rear springs. Remove rear tires.

### **49) SHOCK ABSORBERS...**

[Illustration 70 & 71] Remove shock absorbers. {bolt 15mm, nut 18mm}

**Illustration 70**



**Illustration 71**



### **50) BRAKE LINE BRACKET...**

Unbolt the factory brake line bracket from the frame. {10mm}

### **51) AXLE VENT HOSE...**

Un-clip the axle vent hose from the bottom of the truck bed.

### **52) BUMP STOP...**

[Illustration 72] Remove the rear bump stops from the frame. {13mm}

### **53) UBOLTS AND BLOCKS...**

[Illustration 73] Using a floor jack support the rear axle and remove the u-bolts and discard. {21mm}

Lower the axle and if installing the 4.5" lift remove the factory block; leave the factory block in place if installing the 6" lift.

**Illustration 72**



**Illustration 73**



## **REAR ASSEMBLY**

### **54) LIFT BLOCKS AND UBOLTS...**

□□ [Illustration 74] Install the new lift blocks (55-30-9930). The pins should be offset to the front of the vehicle; there is an indicator notch in the block that should face the front of the vehicle. Make sure the locating pins are seated correctly. Jack the axle back into position while making sure that the axle pins are seated correctly into the block.

□□ [Illustration 74] Install the new ubolts (4.5" lift = 10342 or 6" lift = 10352) using the supplied 9/16" washers and nuts; tighten using the "X" pattern. (91) {7/8"}

**Illustration 74**




### **55) BRAKE LINE BRACKET...**

□□ [Illustration 75] Install the new brake line extension bracket (55-16-9910) to the frame using the factory hardware. (26) {10mm}

□□ [Illustration 75] Use the bracket as a template to drill a 9/32" hole and install the 5/16" x 1" self-tapping bolt. (13) {1/2"} Make sure the new hole is below and forward of the factory hole in the frame.

□ [Illustration 75] Carefully bend brake lines to attach the factory brake line bracket to the new bracket using the supplied 5/16" x 1" bolt, washer, and nut. (13) {1/2"} Do not kink the lines.

**Illustration 75**

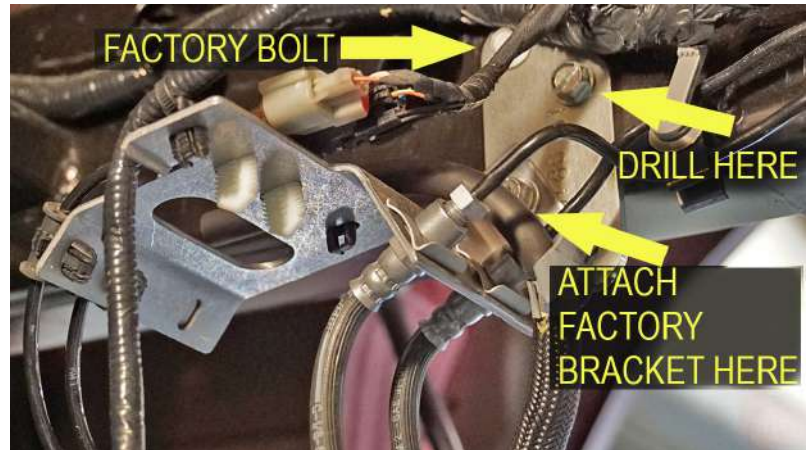


### **56) AXLE VENT HOSE...**

□ Attach the vent hose to the top of the factory brake line bracket.

### **57) EMERGENCY BRAKE BRACKET...**

□ [Illustration 76 & 77] Locate the factory brake line bracket that is retaining the driver's side cable at the front rear spring hanger. Using a pair of pliers carefully bend the bracket down.

**Illustration 76**

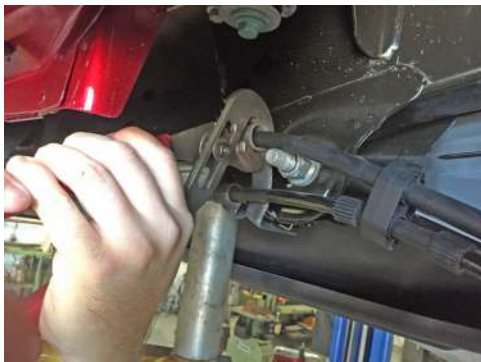

**Illustration 77**



### 58) SHOCK ABSORBERS...

Install the supplied bushings then the sleeves into the shocks.

[Illustration 78] Attach shocks (01-85150 Superide or BE5-6249-H5 Bilstein) to vehicle with the body of the shock positioned on the axle end, using the factory hardware. (55) {bolt 15mm, nut 18mm}

Illustration 78



### 59) BUMP STOPS...

[Illustration 79] Position the new bump stop spacers (55-12-9930) on top of the factory bump stop and attach the frame using the supplied 10mm x 150mm bolt and washer. (40) {8mm allen}

Illustration 79



### 60) TIRES / WHEELS...

Reinstall tires and wheels. Tighten the lug nuts in the sequence shown. (151) {21mm}

**WARNING:** When the tires / wheels are installed, always check for and remove any corrosion, dirt, or foreign material on the wheel mounting surface, or anything that contacts the wheel mounting surface (hub, rotor, etc.). Installing wheels without the proper metal-to-metal contact at the wheel mounting surfaces can cause the lug nuts to loosen and the wheel to come off while the vehicle is in motion.

**WARNING:** Retighten lug nuts at 500 miles after any wheel change, or anytime the lug nuts are loosened. Failure to do so could cause wheels to come off while vehicle is in motion.

Lower vehicle to the floor.

### 61) CLEARANCE CHECK...

With the vehicle on the ground, check all components for proper operation and clearances. Pay special attention to the clearance between the tires / wheels, brake hoses, wiring, etc.

### 62) FOUR WHEEL DRIVE...

Activate four wheel drive system and check for proper engagement.


### 63) HEADLIGHTS...

Re-adjust headlights to proper setting.

### 64) SUPERLIFT WARNING DECAL...

Install the WARNING TO DRIVER decal on the inside of the windshield, or on the dash, within driver's view. Refer to

**DIAGRAM - LUG NUT TORQUE SEQUENCE -**  
Follow the pattern shown to torque the lug nuts.

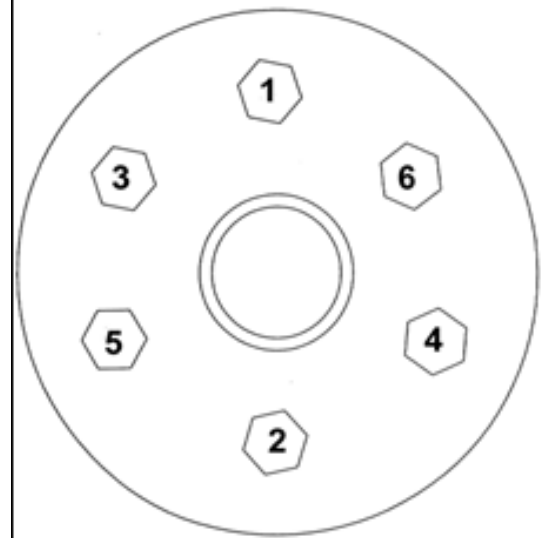

the “NOTICE TO DEALER AND VEHICLE OWNER” section below.

### **65) SUPERLIFT BADGES...**

- This kit is packaged with a Superlift badge. Prior to installation, use the supplied alcohol pad to eliminate all soap and or other non-adhering residues that may impair adhesion, thoroughly clean the entire area of placement.
  
- The adhesive on our badges is pressure sensitive and must be applied using pressure on all areas of the graphic. Like any PSA (pressure sensitive adhesive), it can take up to 72 hours for the adhesive to fully cure. Once the badge is in place do not peel it up, this will diminish the adhesive properties and could result in damaging the badge itself.
  
- To keep your Superlift badge in “like new” appearance keep the badge free/clear of solvents and chemicals that could cause the adhesive to dry or dissolve. This includes gasoline, diesel fuel, paint thinner, and alcohol. Soap and water is all that is needed for cleaning. Degreasers can be used sparingly and hand whipped/applied if needed, although not suggested.

### **Important Maintenance Information**

It is the ultimate buyer’s responsibility to have all bolts / nuts checked for tightness after the first 100 miles and then every 1000 miles. The steering, suspension and driveline systems, plus wheel alignment should be inspected by a qualified professional mechanic at least every 3000 miles.