

# SP2 MODE ADJUST SHOCKS


JEEP JL/IT

1



INSTALL THE TOP OF THE SHOCK BY FOLLOWING THE QUICK START GUIDE.

2

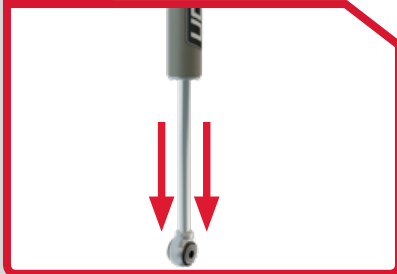

ENSURE THE SHAFT IS EXTENDED OUT ALL THE WAY.

3



ADJUST THE MODE BY ROTATING THE SHAFT 360°.

**PERFORMANCE** - Stability inspired tuning for better handling off-road.

**SOFT/COLD** - Softer tuning for more compliance over harsh roads.

Use this mode when the temperature drops below 40° F (5° C).

4



ROTATE THE EYELET IN THE SAME DIRECTION TO ALIGN WITH LOWER SHOCK MOUNT.

ROTATING IN THE OPPOSITE DIRECTION WILL CAUSE THE MODE TO SWITCH.

5



**MODE ADJUST SHOCKS** give the choice of setting the FALCON SHOCKS base tuning to PERFORMANCE or SOFT/COLD. This choice is made during installation but can be changed later if so desired.

The shocks feature an internal bypass valve that is adjusted by rotating the shaft only when the shock is fully extended.

Piggyback Shocks that feature the FAST ADJUST KNOB or other cartridge adjuster, will still give the full range of adjustability in either mode.

When rotating the shaft, it is easy to feel when the mode switches. Rotating the shaft at least 360° in one direction guarantees the shock will be in the correct mode.