


Installation Instructions  
**Toyota Tacoma**  
**2005 – Present**

Kit Components

Package should include:

Comp.	P/N	Qty
		1
Cable Bolt	000097	1
Tailgate Bracket	000226	1
Instruction Sheet	000229	1
Retainer Clip	P5323YF	2
Rubber Plug	000376	1
Taillight Bolt	000352	1

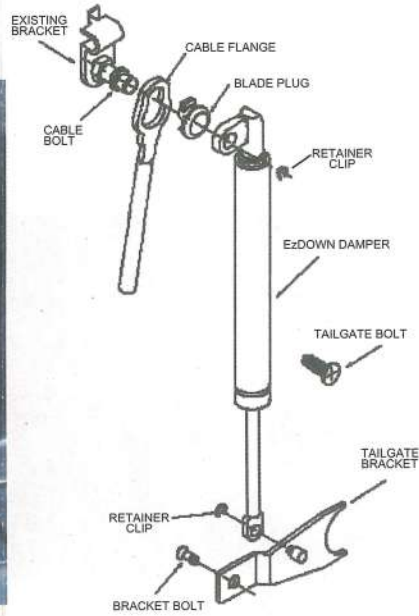

**Step 1: Remove Safety Cable**

Open tailgate. Remove the safety cable's flange from the *truck bed's* cable bolt (**DRIVER SIDE ONLY**). Do **NOT** remove safety cable from the *tailgate's* cable bolt.

**Step 2: Replace Cable Bolt**

Remove cable bolt from truck bed's side panel (**DRIVER SIDE ONLY**).

Slide existing bracket onto new cable bolt. Insert new bolt into truck's bedside panel and tighten cable bolt.

**Step 3: Attach Safety Cable**

Re-Install safety cable to the newly installed cable bolt. Insert safety cable's mounting flange into the **groove closest to the taillight**.

**Step 4: Remove Taillight Bolt**

Remove existing lower taillight bolt.



Existing Taillight Bolt

### Step 5 : Install New Taillight Bolt

Install new taillight bolt supplied in kit.

### Step 6: Insert Rubber Plug Into Cable's Mounting Flange

Insert rubber plug into the hole of the cable's mounting flange. **NOTE: Position the notched portion of the plug under the cable bolt.**

### Step 7: Install Cable Bolt to

Install mounting flange to cable bolt. **NOTE POSITION OF MOUNTING FLANGE.**

### Step 8: Install Retainer Clip

Secure by installing retainer clip to cable bolt's groove.

### Step 9: Remove Tailgate Bolt

Remove existing tailgate bolt **(SECOND BOLT FROM HINGE) DRIVER SIDE ONLY.**



New Taillight Bolt



Rubber Plug



### Step 10: Install Tailgate Bracket

Place bracket against the tailgate's side and align bracket hole with the bolt hole from **Step 9**. **BRACKET MUST FIT FLUSH AGAINST TAILGATE.** Attach bracket using existing bolt from **Step 9**. **DO NOT OVERTIGHTEN.**

### Step 11: Install Damper To Tailgate Bracket

Install small end of Damper onto the tailgate bracket stud that was installed in step 10. Secure with retainer clip.

